



(1)

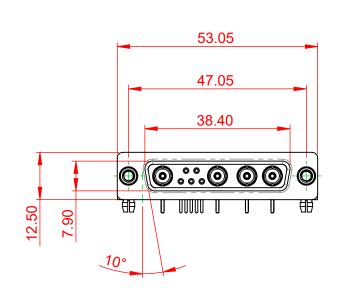



NOTES:


MATERIAL: HOUSING: SHELL: CONTACT:	THERMOPLASTIC POLYESTER, UL94V- STEEL, NICKEL PLATED COPPER ALLOY, 30µ GOLD PLATED	-0
OPERATING TEMPERATURE:	-55°C ~ 125°C	
POWER/CO-AX CONTACT RATING: (IF PRESENT)	50Ω (IMPEDANCE)	
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT	
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.	W
INSULATOR RESISTANCE:	5000MΩ min.	

DIELECTRIC WITHSTANDING VOLTAGE:


.XX ±0.13

.XXX ±0.05





		SW REFERENCE NO.: 630 C	ENCE NO.: 630 COMBO ASSEMBLY	
		DRAWN: C.B	DATE: JAN. 01/201	19
			DATE:	
EDACI	INC THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
	DNTARIO SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 630-9W4	-640-5ND	ISSUE
YOUR CONNECTION TO QUALITY & S	ERVICE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 630-9W4	-640-5ND	1





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. 5000MΩ min.

