



### Electrical Specifications

**Cutoff Frequency (Fc):** 25 MHz  
**Passband:** 25-1300 MHz  
**Passband Insertion Loss :** 2.0dB Max.  
**Passband Return Loss:** 15dB Min.  
**Rejection:** 50 dB Min. @ 0-15 MHz


### Mechanical

**Connector Type:** SMA(F) & SMA(M)  
**Dimensions:** 2.5" x 0.75" x 0.5"

### Environmental

**Operating Temperature:** -25°C to +70°C  
**Storage Temperature:** -60°C to +90°C  
**Shock:** 10 G. 11ms  
**Vibration:** 10 G. 5 to 200Hz

### Outline Drawing:

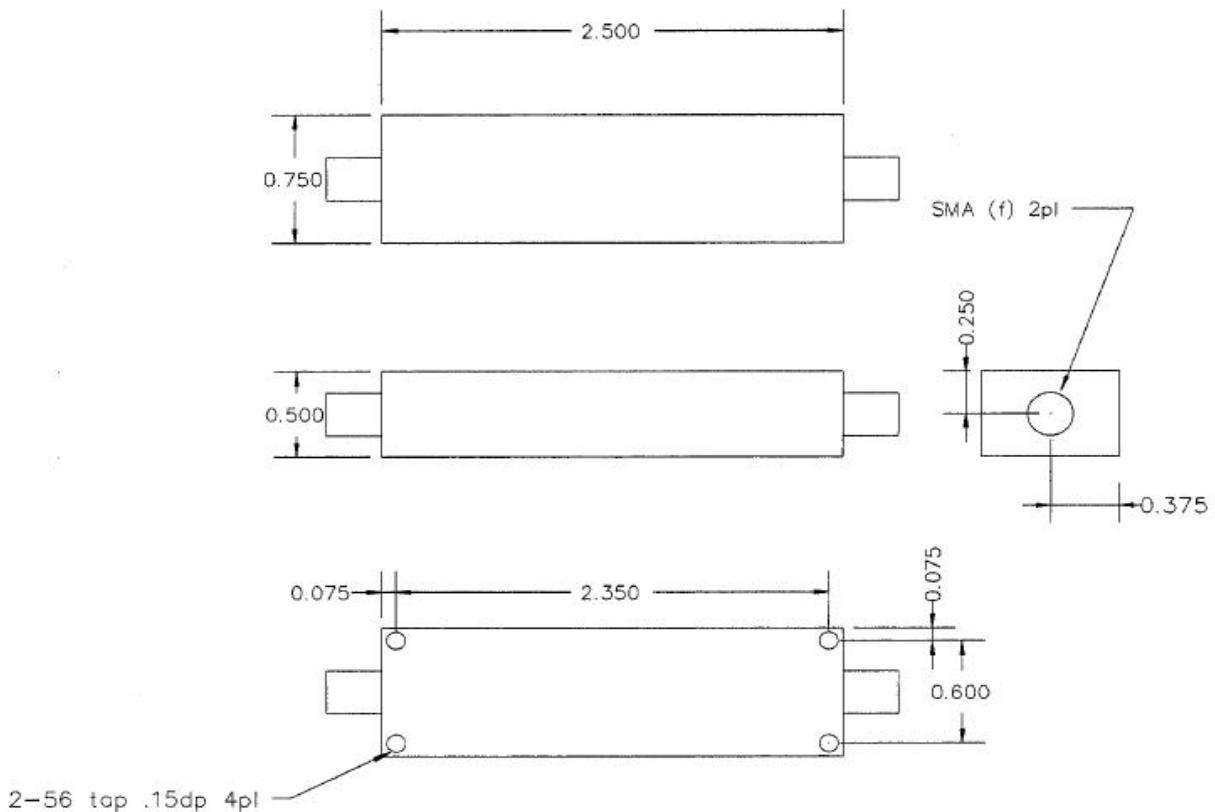



**Response Plot :**

