
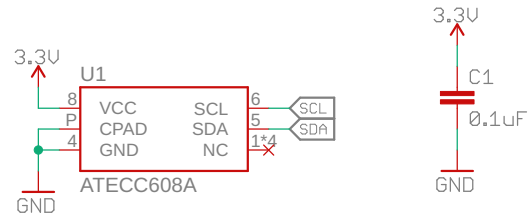


# ATECC608A - CryptoAuthentication IC





VCC RANGE: 2.0V to 5.5V  
IO LEVELS: 1.8V to 5.5V

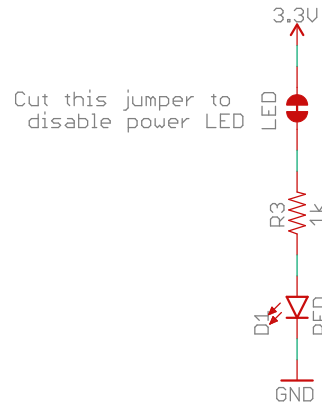

DEFAULT I2C ADDRESS: 0x60  
(software definable)

## Connectors and I2C Pullups

This jumper connects SDA and SCL to 4.7k pull-up resistors.

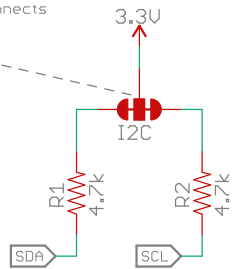

Released under the Creative Commons Attribution Share-Alike 4.0 License  
<https://creativecommons.org/licenses/by-sa/4.0/>



TITLE: Qwiic\_ATECC608A

Design by: Pete Lewis

REV:  
v10

Date: 10/25/2019 12:31 PM

Sheet: 1/1