
THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.







(1)

ORIGINAL

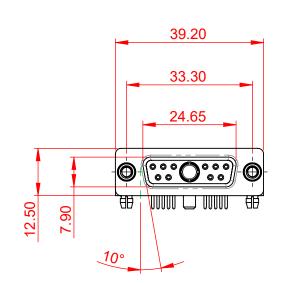







NOTES:

.X ±0.25 .XX ±0.13

.XXX ±0.05

MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, NICKEL PLATED CONTACT: COPPER ALLOY, 30µ GOLD PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mQ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

CONTACT CODE 40 POWER CONTACT FOOTPRINT - 13.20mm 40 IS STANDARD AS SHOWN ON SHEETS 3 & 4 CONTACT CODE 50 POWER CONTACT FOOTPRINT - 20.33mm


		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4
	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 630-11W1650-3ND		ISSUE
YOUR CC		MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 630-11W	1650-3ND	1



COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

SW REFERENCE NO.: 630 COMBO ASSEMBLY		
DRAWN: C.B	DATE: JAN. 01/20)19
CHECKED:	DATE:	
SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	
DRAWING NUMBER: 630-11W	1650-3ND	ŀ
	1650 3ND	1

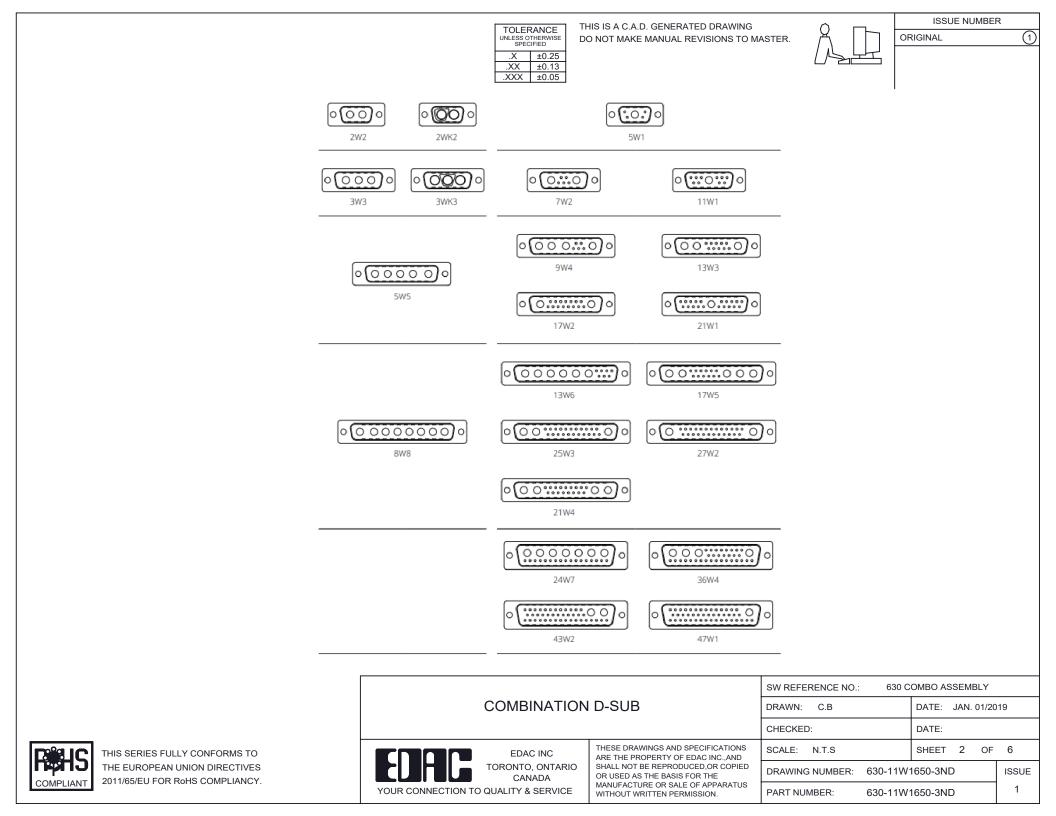



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

 $\overline{(1)}$

2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female





5W5 Male



PCB EDGE

8W8 Male



PCB EDGE






27W2 Male/Female

21W4 Male/Female


PCB EDGE


5W5 Female

COMPLIANT



8W8 Female






22.70 2.77 PCB EDGE

21W1 Male/Female



	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
0	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: N.T.S	SHEET 3 OF	4
res CY.	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-11	W1650-3ND	ISSUE
			PART NUMBER: 630-11	W1650-3ND	1


CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2




17W2 Male/Female

THIS SERIES FULLY CONFO THE EUROPEAN UNION DIF 2011/65/EU FOR RoHS COM

ORMS TO	
RECTIVES	
IPLIANCY.	





PCB EDGE

TOLERANCE UNLESS OTHERWISE SPECIFIED DAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.
















13W3 Male





25W3 Male





2.77

24.77

23.3


PCB EDGE

PCB EDGE

31.75

21.9

36W4 Female

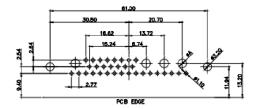

13W6 Male





30.50

2.77

22.16

20.76

13W6 Female

13W3 Female

.X±0.25.XX±0.13.XXX±0.05

43W2 Female





17W5 Male







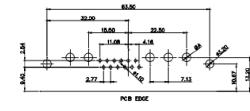


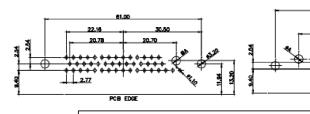


20.7

13.72

PCB EDGE

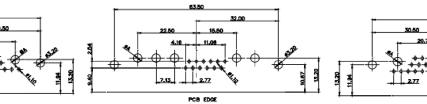



		SW REFERENCE NO.	SW REFERENCE NO.: 630 COMBO ASSEMBLY		
	COMBINATION D-SUB	DRAWN: C.B	DATE: JAN. 01/20	19	
		CHECKED:	DATE:		
THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES	EDAC INC THESE DRAWINGS AND S	JOCALL. N.I.J	SHEET 4 OF	4	
	TORONTO, ONTARIO CANADA OR USED AS THE BASIS F	OR THE DRAWING NUMBER:	630-11W1650-3ND	ISSUE	
COMPLIANT 2011/65/EU FOR RoHS COMPLIANCY.	YOUR CONNECTION TO QUALITY & SERVICE MANUFACTURE OR SALE WITHOUT WRITTEN PERM		630-11W1650-3ND	1	