

т	۵	п	m	0



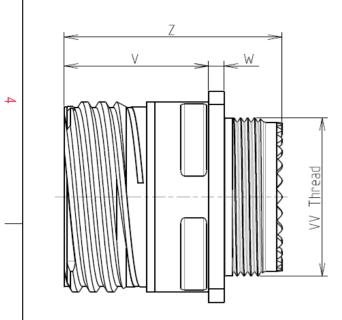

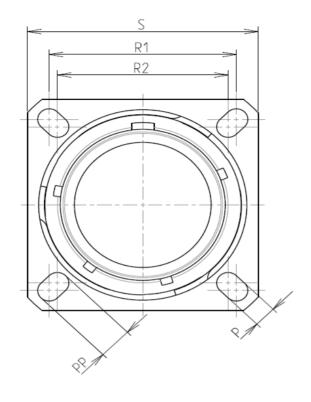

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 25

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

Ì	-Shell Material	: Aluminium		
	-Shell Plating	: Black Zinc Nickel		
	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
-Durability		: 500 Mating cycles		
	-Delivered with Souriau contacts and Accessories			
	-Temperature Range	: -65°C to +175°C		
	-Salt Spray	: 500 hours		

: 75.26 g ± 10%

8D 0

G

25

Ζ

61

В

F

В


Connector dimension				
Dim	Nominal			
Р	3.91±0.2			
РР	6.15±0.2			
R1	38.1			
R2	34.93			
S	46±0.3			
V	20.07+0/-1.25			
W	2.1/3.2			
Z	31.5 Max			
VV THREAD	M37x1-6g			


**ORIENTATION : B** 

CONTACT LAYOUT : 25-61

CONTACT TYPE : SOCKET(500 Matings)

Е



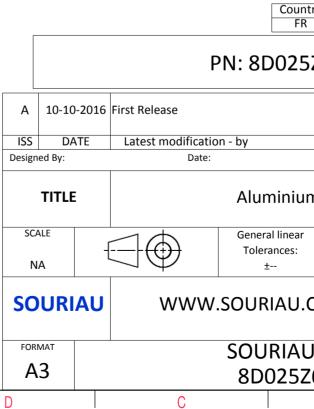

	Φ		A					
AS EXA	AMPLE				3			
any non-conformity or damage which does not comply with of the Parties or by a third party adation, technical notice.)								
untry FR	/ Jurisdiction & Control List Not Listed							
5Z61BB								
				MOD N°				
um	customer drawing n Receptacle 8D series							
ar	NPRDS / PROJECT							
		8	359		1			
This document is the property of SOURIAU it must not be reproduced or communicated without permission								
	UDRG N° SHEET							
026	1BB-C B		A	1/2	J			

