


**Notes:**

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Date Code and Part No, Black Text.
3. 100% Tested to Table Performance

**ConductRF(Wk/Yr)  
D12A28-S1PMF-XXX**

Marking Direction

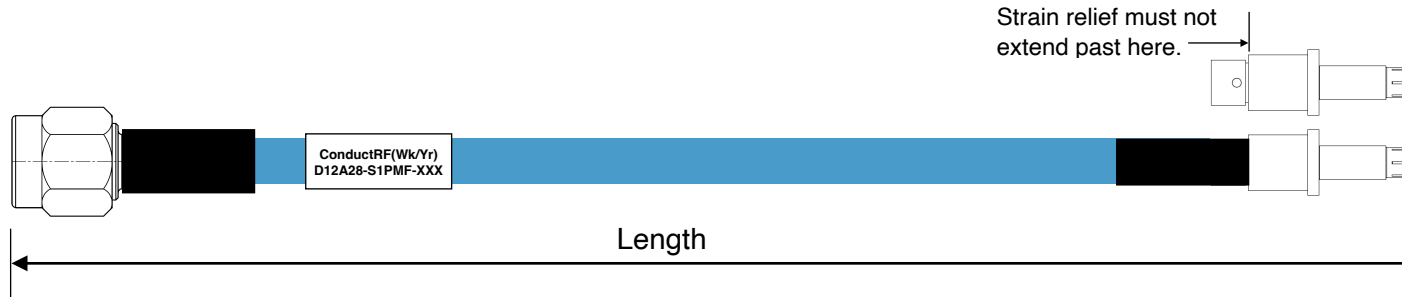

CRF #	Length	Typ. Insertion Loss(dB)		
		6GHz	12GHz	18GHz
XXX	Inches			
S06	6"	0.49	0.71	0.88
S12	12"	0.80	1.16	1.45
S18	18"	1.11	1.61	2.01
S24	24"	1.43	2.07	2.58
S36	36"	2.05	2.97	3.72
S48	48"	2.67	3.88	4.85
S60	60"	3.29	4.79	5.98
VSWR (Max)		1.25:1	1.35:1	1.45:1

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)  
 SXX = Length in Inches (eg S18=18")  
 XMX = Length in Meters (eg 2M5=2.5m)  
 CXX = Length in CM (eg C50=50cm)

5	Markers	FT.	AS NEEDED	Shrink Tube - CPA	White
4	Strain Reliefs	FT.	AS NEEDED	Shrink Tube - CPA	Black
3	Flexible Cable 0.085"	FT.	AS NEEDED	A28SS	Blue FEP
2	SMPM Female #12 D38999	EA,	1	PMF11D-A28G01	Gold
1	SMA Male	EA,	1	PSM12B-A28G01	Gold/SS
ITEM	DESCRIPTION	UOM	Qty	MATERIALS	FINISH

REV.	DESCRIPTION	ECN	DRAWN	DATE	Dimensions are nominal & are reference only, unless specifically called out.	Checked: JW	Approved: PL	Rev: 3	Part No: D12A28-S1PMF-XXX		
3	Added Lengths		DG	07/28/22	Customer DWG	Title: <b>D38999 #12 SMPM F to SMA M on A28SS</b>					
2	Updated Table Perf.		DG	09/28/20		Remarks: 035/035/5	Originated: 05/05/17	Contact: Sales@ConductRF.com Tel: +1 978 374 6840		Range: 38999	Sheet 1 of 1
1	Pre-Release		DG	05/05/17		Dwg Ref: D12A28-S1PMF					
REVISION HISTORY											