


Tool Specification

1. Part Number: YRS-480

2. Terminal: SXH-002T-P0.6

3. Application

Crimp Position	AWG UL1007	Tensile Strength N (kgf)	Strip Length mm
30	AWG 30	7.8(0.8) min.	2.0
28-26	AWG 28	9.8(1.0) min.	2.0
28-26	(AWG 26)	(19.6(2.0) min.)	2.0

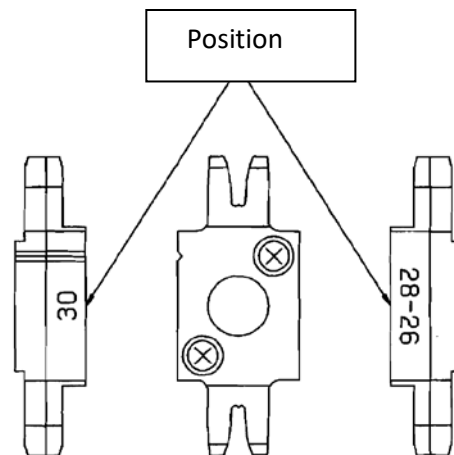

PART NUMBER	DESCRIPTION	
YRS 7014-0067 CRIPMER ASSY	UPPER CRIMPER ASSEMBLY	
YRS 7014-0071 ANVIL A	CONDUCTOR ANVIL	
YRS 7014-0062 ANVIL B	INSULATION ANVIL	
YRS 7014-0010 SHEAR BLADE	SHEAR BLADE	

- Check the crimp appearance and tensile strength prior to use.
- Select the appropriate crimp position based on the wire size that will be used.
- The wire size in () above could cause excessive crimping. Check the tensile strength and crimp appearance to confirm an acceptable crimp.
- The insulation barrel is set for the type of wire listed and is not adjustable.