

MATERIALS AND FINISHES:

SMA PLUG STR IP68

BODY, COUPLING NUT, CRIMP TUBE BRASS
PLATED GOLD 30 MICROINCHES MIN.

CONTACT BRASS
PLATED GOLD 30 MICROINCHES MIN.

INSULATOR TEFLON

GASKET SILICONE RUBBER

SNAP RING BERYLLIUM COPPER

SHRINK TUBE VERSAFIT
OR EQUIVALENT



CABLE DIA 1.37

UFL

BODY PHOSPHOR BRONZE
PLATED GOLD 30 MICROINCHES MIN

INSULATOR PBT

CONTACT PHOSPHOR BRONZE
PLATED GOLD 30 MICROINCHES MIN

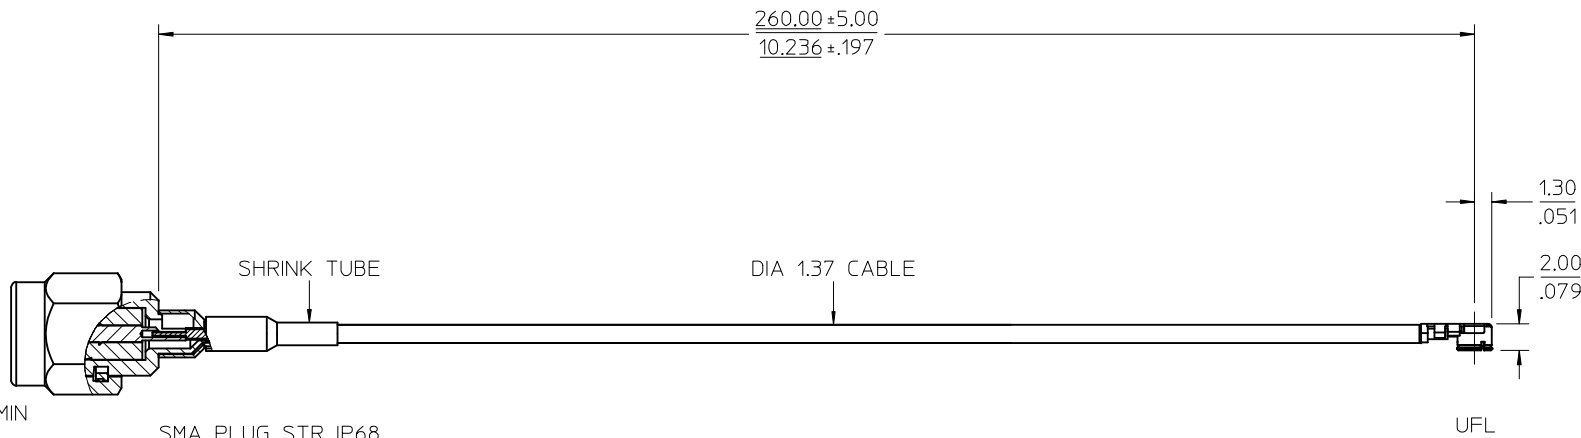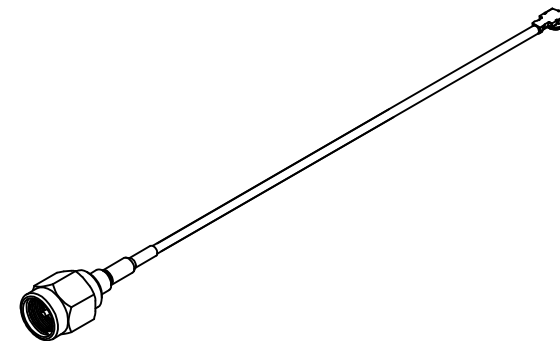

89762-4750	POLYBAG
------------	---------

PART NO	PACKAGING
---------	-----------

MIL-STD-348A, FIG. 310.1	SMA INTERFACE
--------------------------	---------------

SPECIFICATION	DESCRIPTION
---------------	-------------

CHG:NEW RELEASE PER PDR13051321 EC NO: URF:2013-0662 DRW:RYEH CHKD: APPR:MHUANG 2013/06/04	QUALITY SYMBOLS	DESCRIPTION
	▽=0	
	▽=0	
	▽=0	

GENERAL TOLERANCES (UNLESS SPECIFIED)	
mm	INCH
4 PLACES ± .---	± .---
3 PLACES ± .---	± .---
2 PLACES ± .---	± .---
1 PLACE ± .---	± .---
0 PLACE ± .---	± .---
ANGULAR ± 2 °	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE	
MM/IN	
DRAWN BY	DATE
RYEH	2013/05/06
CHECKED BY	DATE
JOANNE LIAO	2013/05/06
APPROVED BY	DATE
MHUANG	2013/06/04
MATERIAL NO.	
SEE TABLE	
SIZE	
C	

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
3.5:1	METRIC	
TITLE		
CA SMA PLUG STR TO UFL W/DIA 1.37 CABLE CA-SMAP/UFL		
molex		
DOCUMENT NO.		SHEET NO.
SD-89762-475		1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		