


3532.2

ZIZA 1,5/3/PE GNYE

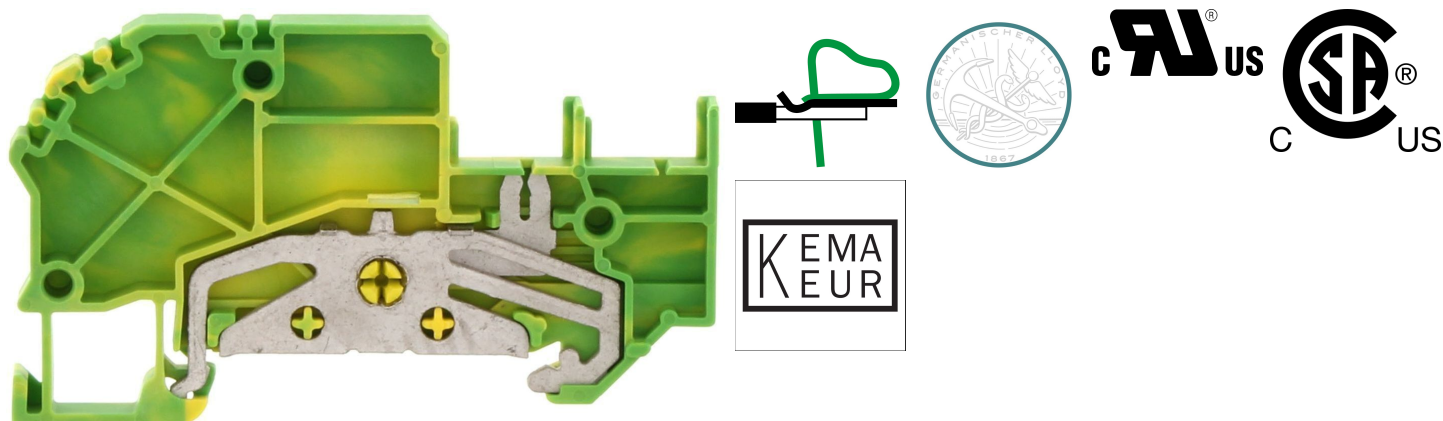

Initiator terminal / actuator terminal, Tension-spring connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 1.5 mm<sup>2</sup>, Width: 51 mm, Colour: Green-yellow

## Business data

Packaging unit	20
Quantity unit	PC
Weight per piece (not including packaging)	10 g
Weight per piece (including packaging)	11 g
Unit of weight	G
Customs number	85369010
Country of origin	CZ
Product description	Initiator terminals / actuator terminals

3532.2

ZIZA 1,5/3/PE GNYE

## Technical data

### Dimensions

Length	68.7 mm
Width	51 mm
Height TS 35/7.5	40.5 mm
Pitch	5 mm

### Ratings

Rated cross-section	1.5 mm <sup>2</sup>
Overvoltage category	III
Contamination degree	3

### Connection data

Connection principle	Tension-spring connection
Connections	2
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.5 mm <sup>2</sup>
Wire cross-section single core (rigid)/stranded, max.	2.5 mm <sup>2</sup>
Wire cross-section stranded, min.	0.5 mm <sup>2</sup>
Wire cross-section stranded, max.	2.5 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.5 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	1.5 mm <sup>2</sup>
Wire cross-section AWG, min.	26
Wire cross-section AWG, max.	14
Stripping length	8 mm

### Materials

Insulation housing	Polyamide 6.6, Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	120 °C

3532.2

ZIZA 1,5/3/PE GNYE

---

## Technical data

---

### Further technical data

---

Mounting type	Mounting rail TS 35/7,5
Gauge plug acc. to EN 60 947-1	A1
End plate required	✓
PE connection available	✓

---

### Print

---

Colour	Green-yellow
--------	--------------

---

### Environmental Product Compliance

---

REACH Conform	yes
REACH Reference date	2022-01-17
REACH Candidate Substance Note	No
RoHS Conform	yes

---

**3532.2**

**ZIZA 1,5/3/PE GNYE**

---

## Approvals

---

### CSA approval

---

CSA approval	C22.2 No 158
CSA approval granted	yes
CSA wire cross-section AWG, min.	26
CSA wire cross-section AWG, max.	14
CSA stripping length	8 mm

### CSAus approval

---

CSAus approval	UL 1059
CSAus approval granted	yes
CSAus wire cross-section AWG, min.	26
CSAus wire cross-section AWG, max.	14
CSAus stripping length	8 mm

### cUL Recognized

---

cUL approval	C22.2 No 158
cUL wire cross-section single-core (rigid) AWG, min.	26
cUL wire cross-section single-core (rigid) AWG, max.	14
cUL wire cross-section stranded AWG, min.	26
cUL wire cross-section stranded AWG, max.	14
cUL wire material	Cu
cUL Recognized	yes

### German Lloyd approval

---

GL approval	IEC 60947-7-1:2009, IEC 60947-7-2:2009
GL approval granted	yes
GL wire cross-section single core (rigid), min.	2.5 mm <sup>2</sup>
GL wire cross-section single-core (rigid), max.	1.5 mm <sup>2</sup>
GL wire cross-section, min.	1.5 mm <sup>2</sup>
GL wire cross-section stranded, max.	2.5 mm <sup>2</sup>
GL environmental category	C

---

3532.2

ZIZA 1,5/3/PE GNYE

---

## Approvals

---

### KEMA KEUR approval

---

KEMA KEUR approval	EN 60947-7-1:2009, EN 60947-7-2:2009
KEMA KEUR approval granted	yes
KEMA wire cross-section single core (rigid), min.	0.5 mm <sup>2</sup>
KEMA wire cross-section single-core (rigid), max.	2.5 mm <sup>2</sup>
KEMA wire cross-section stranded, min.	0.5 mm <sup>2</sup>
KEMA wire cross-section stranded, max.	2.5 mm <sup>2</sup>

### UL Recognized

---

UL approval	UL 1059
UL wire cross-section single-core (rigid) AWG, min.	26
UL wire cross-section single-core (rigid) AWG, max.	14
UL wire cross-section stranded AWG, min.	14
UL wire cross-section stranded AWG, max.	26
UL wire material	Cu
UL factory wiring	yes
UL field wiring	yes
UL Recognized	yes

---


3532.2

ZIZA 1,5/3/PE GNYE

---

## Media

---

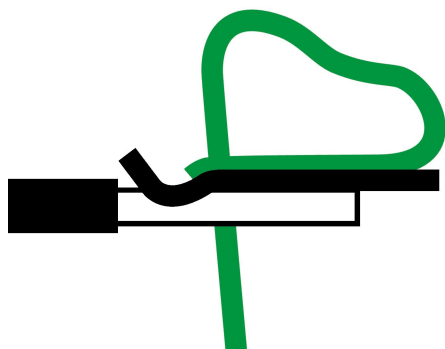


3532.2

ZIZA 1,5/3/PE GNYE

## Accessories

### End plate

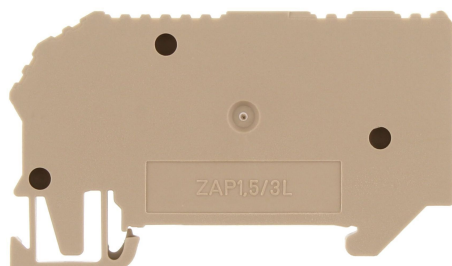


End plate, Width: 5.1 mm, Colour: Beige

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
3746.2	ZAP/TW ZIZA 1,5/3 BG	4044211060558	20 ST

### End stop

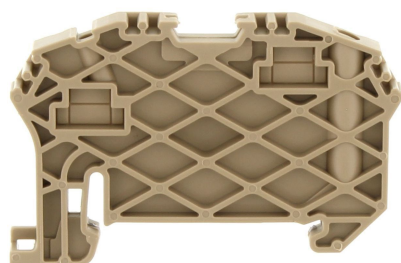

End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 6 mm, Colour: Beige

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
3748.2	ZES 35 BG	4044211060572	50

3532.2

ZIZA 1,5/3/PE GNYE

---

## Accessories

---

### Potential distribution strip

---



Potential distribution strip, Tension-spring connection, Mounting type: Plug in, Rated cross-section: 1.5 mm<sup>2</sup>, Width: 8.7 mm, Colour: Green-yellow

---

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
3743.2	ZPL 1,5/PE GNYE	4044211060527	100 ST

---

### Test adapter

---



Test adapter, Pitch size: 5.1 mm, Colour: Beige

---

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
17034.2	ZTA 1,5	4044211155452	10 ST

---




3532.2

ZIZA 1,5/3/PE GNYE

## Accessories

### Quick marking



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 5 mm, Colour: White

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
4600.7	PMC SB 5/50 WH	4044211088903	500 ST

## Screwdriver



Screwdriver with bare blade, Colour: Black-grey

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
1085.0	SDB 0,5x3,0	4044211014643	1 ST