



.XX ±0.13 .XXX ±0.05





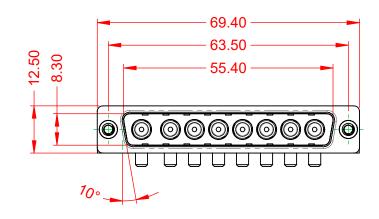




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED



| OPERATING TEMPERATURE:                      | -55°C ~ 125°C  |
|---|----------------|
| POWER/CO-AX CONTACT RATING:<br>(IF PRESENT) | 30A (CURRENT)  |
| SIGNAL CONTACT CURRENT RATING:              | 5A PER CONTACT |
| SIGNAL CONTACT RESISTANCE:                  | 10mΩ MAX.      |
| INSULATOR RESISTANCE:                       | 5000MΩ min.    |

DIELECTRIC WITHSTANDING VOLTAGE:

1000V AC rms



|             |             |   | SW REFERENCE NO.: 629 COMBO ASSEMBLY |                  |       |
|-------------|-------------|---|--------------------------------------|------------------|-------|
|             | COMBINATION | COMBINATION D-SUB   |                                      | DATE: JAN. 01/20 | 19    |
|             |             |   | CHECKED:                             | DATE:            |       |
| то          | EDAC INC    | THESE DRAWINGS AND SPECIFICATIONS<br>ARE THE PROPERTY OF EDAC INCAND  | SCALE: (IN C.A.D. 1:1)               | SHEET 1 OF       | 2     |
| VES<br>NCY. |             | SHALL NOT BE REPRODUCED, OR COPIED<br>OR USED AS THE BASIS FOR THE<br>MANUFACTURE OR SALE OF APPARATUS<br>WITHOUT WRITTEN PERMISSION. | DRAWING NUMBER: 629-8W8-250-3T4      |                  | ISSUE |
|             |             |   | PART NUMBER: 629-8W8                 | -250-3T4         | 1     |



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVE 2011/65/EU FOR RoHS COMPLIANC

