



(1)

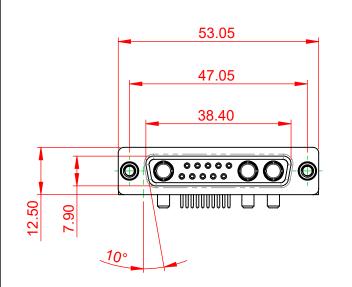



## NOTES:


MATERIAL: HOUSING: SHELL: CONTACT:	THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED
OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	30A (CURRENT)
SIGNAL CONTACT CURRENT RATING SIGNAL CONTACT RESISTANCE:	C: 5A PER CONTACT 10mΩ MAX.

**INSULATOR RESISTANCE:** DIELECTRIC WITHSTANDING VOLTAGE:

.XX ±0.13


.XXX ±0.05

1000V AC rms



	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-13W3240-3NE		ISSUE
YOUR CONNECTION TO			PART NUMBER: 630-13W	3240-3NE	1

5000MΩ min.





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



