

Mounting Option

12-.128 (3.25) Dia. Side Mounting Holes

Contact Detail

500-Wire Hole .050x.025(1.27x0.64) - Tail LG=.260(6.60) .156 [3.96] Contact Spacing x .200 [5.08] Row Spacing





See Accompanying Pages for:

- **Contact Bend Details**
- **Mounting Options**
- **Features and Specifications**



	0.330 [8.38] Card Slot
.160 [4.06] Point of Contact—	
	SECTION A-A

837	Series High Temp Card Edge Connector
Part	Number: 887-010-500-612



	CHECKED:	DATE:	
	SCALE: NTS	SHEET	1 OF 4
D	DRAWING NUMBER		ISSUE
	837 Assembly		1

J.LEE


837 ENG MASTER DATE: OCT. 06/09

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER


ISSUE NUMBE

ORIGINAL

1

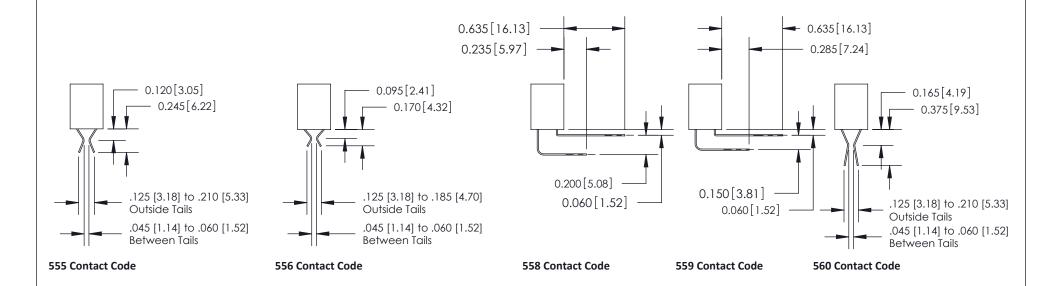

837 Series High Temp Card Edge Connector Contact Bend Detail		ACAD REFERENCE NO. 837 ENG MASTER			
		DRAWN: J.LEE	DATE: OCT. 06/09		
		CHECKED:	DATE:		
EDAC INC	RONTO, ONTARIO ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	SCALE: NTS	SHEET :	2 OF 4	
TORONTO, ONTARIO		DRAWING NUMBER	•	ISSUE	
YOUR CONNECTION TO QUALITY & SERVICE		837 Assembly		1	

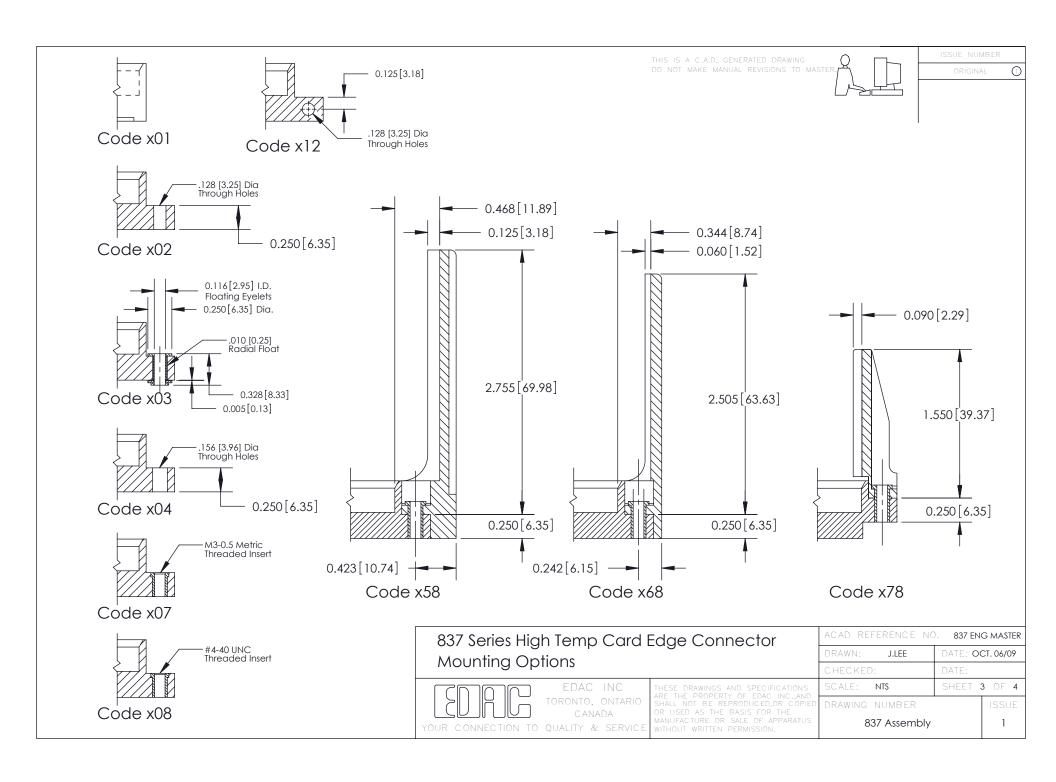



Features

- CSA Approved and UL Recognized
- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree & Extender Board Bends
- Single or Dual Row Configurations
- Large Variety of Mounting Options, Flush or Offset Lugs
- Pre-assembled Card Guides Available
- Accepts Between Contact and In-Contact Polarizing Keys

Specifications

- Insulator Material: DAP
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +165 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

	837 Series High Temp Card Edge Connector		ACAD REFERENCE NO. 837 ENG MASTER			
Features and Specifications		DRAWN:	J.LEE	DATE: OC	CT. 06/09	
	redictes and specifications		CHECKED:		DATE:	
	COOO EDAC INC	THESE DRAWINGS AND SPECIFICATIONS	SCALE:	NTS	SHEET .	4 OF 4
	TORONTO, ONTARIO	ARE THE PROPERTY OF EDAC INC.AND - SHALL NOT BE REPRODUCED.OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING	NUMBER		ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		8	37 Assembly		1