Ξ	വ	н т	m	0







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 13

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium	
-Shell Plating	: Olive drab Cadmium	
-Insulator	: Thermoplastic	
-Contacts	: Copper Alloy	
-Seals & Grommet	: Silicon Elastomer	
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum	
-Durability	: 500 Mating cycles	
-Delivered with Souriau contacts and Accessories		
-Temperature Range	-65°C to +175°C	
-Salt Spray	: 500 hours	

: 16.46 g ± 10%

8D 0

G

13

W

26

А

F

Ν


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M18x1-6g		


ORIENTATION : N

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 13-26



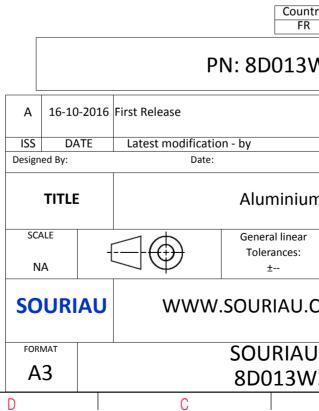

Φ	Þ				
		4			
S EXAMPLE		3			
any non-conformit which does not co or of the Parties or b adation, technical n untry Jurisc R 3W26AN	mply with by a third party	2			
	CUSTOMER DRAWING				
um Receptacle 8D series					
ar	NPRDS / PROJECT 859				
	This document is the property	of 1			
COM SOURIAU it must not be reproduced or communicated without permission					
UDRG N° SHEET					
W26AN-C		1/2			
В	A A				

_	Ŧ	۵	п п	m		0
		Contact Layout				Panel Cutou
4					~ -	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
_		2#12 6#22D			V	
ω	Ctc A B C D E F 1 2	13-26 X Y 0 3.47 2.47 4.34 2.47 -4.34 0 -3.47 -2.47 -4.34 -2.47 4.34 3.25 0 -3.25 0				Dim ØA ØA R1 ØT
	\vdash					
						SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either of (professional recommendat Countr
N						PN: 8D013V
					A 16-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
					TITLE	Aluminium
<u> </u>					SCALE NA	General linear Tolerances: ±
					SOURIA	U WWW.SOURIAU.C
				_	FORMAT A3	SOURIAU 8D013W
L	Н	G	F	E	D	С

