

—	۵	П	m	D	0



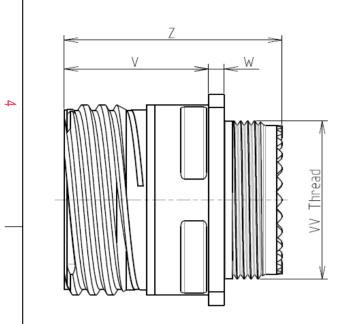

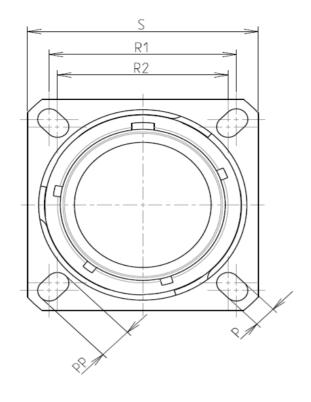

Keying Shown as example

CHARACTERISTICS

ယ

 \mathbf{N}

-Mass

BASIC SERIES:

SHELL SIZE : 15

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III


-Shell Material	: Aluminium
-Shell Plating	: Olive drab Cadmium
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy 0.8µm minimu
-Durability	: 500 Mating cycles
-Delivered with Souriau	a contacts and Accessories
-Temperature Range	: -65°C to +175°C
-Salt Spray	: 500 hours

: 24.88 g ± 10%

8D 0

G

Connector dimension			
Dim	m Nominal		
Р	3.25±0.2		
PP	4.39±0.2		
R1	24.61		
R2	23.01		
S	31±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M22x1-6g		

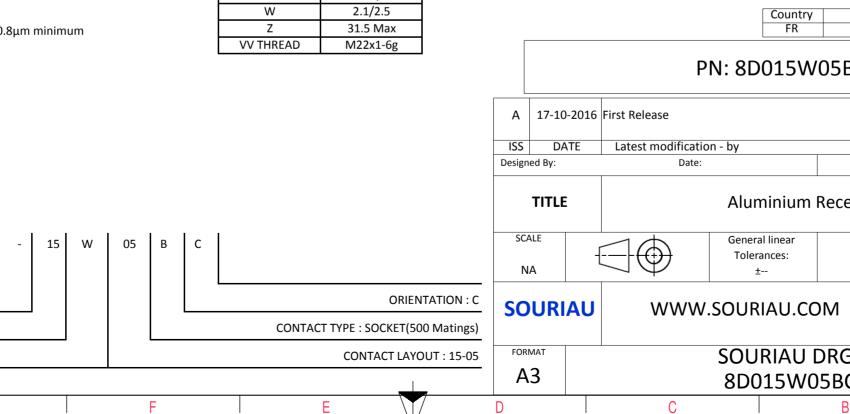

0		Φ		Þ		
			}			4
LAY	OUT SHOWN AS EXA	MPLE				3
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) $\frac{Country \qquad Jurisdiction \& Control List \\ \hline FR \qquad Not Listed}$ PN: 8D015W05BC						2
First Release	n - hv				MOD N°	
Latest modificatio Date:	ii - Dy		CUSTO	MER DRAWING		
Aluminium Receptacle 8D series						
$\exists \bigoplus$	General linear Tolerances: ±		NPR	DS / PROJECT 859		1
WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	SOURIAU I 8D015W0				SHEET	
С		B		A		J

		۵	н т	m	D	0	
		Contact Layout					Panel Cutou
4	د 	$ \begin{array}{c} & & & \\ & & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ &$				SQUARE FLANGE RECEPT REAR MOUNT	ACLE (TYPE O)
		Location X-axis Y-axis (mm) (mm) +.000 (0.00) +.100 (2.54) +.174 (4.42) +.024 (0.61) +.094 (2.39) 148 (3.76) 094 (2.39) 148 (3.76) 174 (4.42) +.024 (0.61)					ØA ØT
ω							Dim ØA ØAA R1 ØT
						due to a the Specifica	hall not be liable for any use of the Products wh tions issued by either of fessional recommendat
N							Countr FR
							PN: 8D015V
						10-2016 First Release	
					ISS Designed By	DATE Latest modifi	cation - by bate:
					ТІТ	LE	Aluminium
<u> </u>					SCALE		General linear Tolerances: ±
					SOUF	RIAU WW	/W.SOURIAU.C
					FORMAT A3		SOURIAU 8D015W
	H	G	F	E	D	C	

