


DO NOT SCALE  
DIMENSIONS IN mm

METRIC

THIRD ANGLE  
PROJECTION

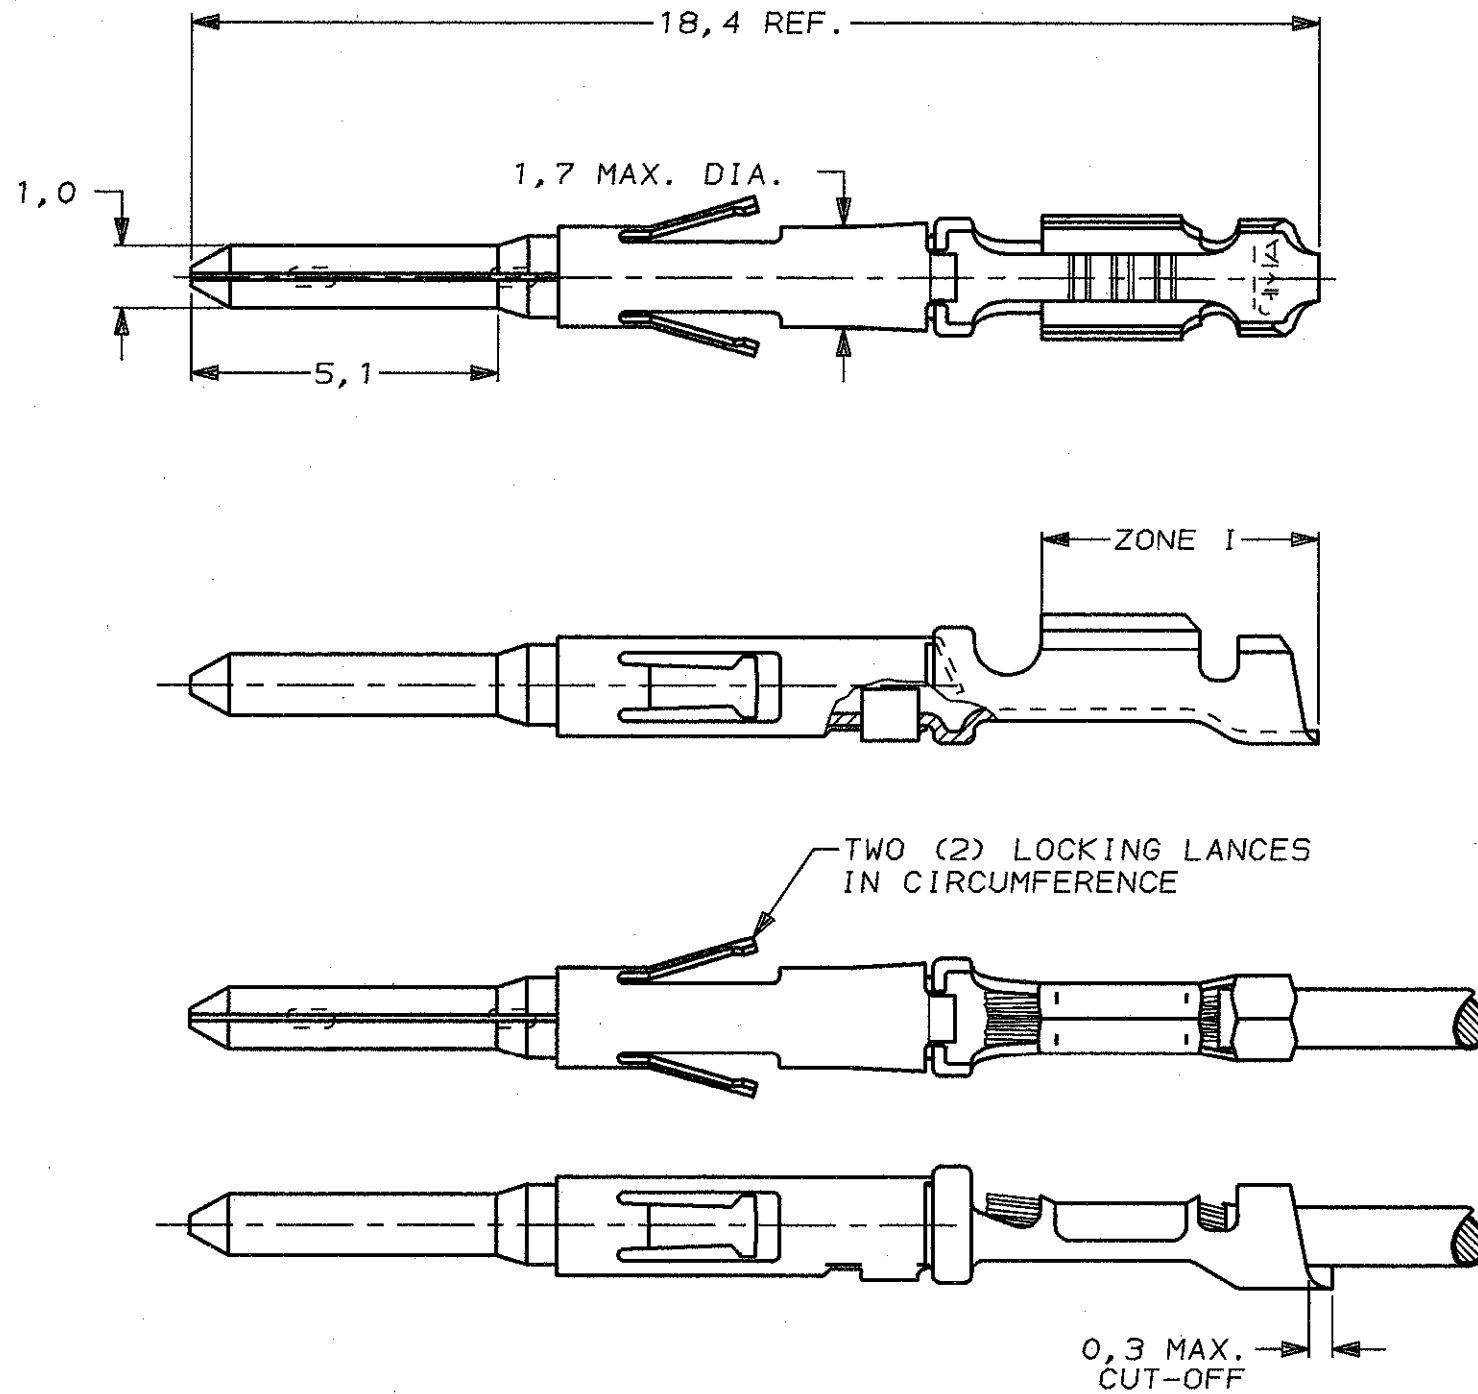

NOTES:

- ① FOR STRIP VERSION SEE DWG. 166047.
- ② UNDERCOATING: 1,3µm Ni.  
SELECTIVE : 0,8µm Au.  
ZONE I : BRIGHT TIN/LEAD PLATED.

WIRE RANGE :  
(0,05-0,14mm<sup>2</sup>) 26-30 AWG  
INSULATION RANGE :  
1,22 MAX. DIA.

-	-	-	-
-	-	-	-
STAINLESS STEEL	SEE NOTE ②	BRASS	166297-1
MATERIAL OF SLEEVE	PLATING OF BODY	MATERIAL OF BODY	PARTNUMBER
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
A	EH-0077-92	JvL CVT	04-03-94
LTR.	REVISION RECORD	DR.	CHK. DATE
DR. : J.v.LIEMPT	CHK. : C.v.TILBURG	APP. : L.v.SOEST	DWG.No. C-166297
DATE : 6 JAN 1993	DATE : 08-02-93	DATE : 08-02-93	REV.LTR. A SHEET 1 OF 1

**CUSTOMER DRAWING** FOR REFERENCE ONLY  
WILL NOT BE UPDATED  
© COPYRIGHT 19- BY AMP HOLLAND B.V.  
ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE  
COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.  
THIS DRAWING IS UNPUBLISHED  
RELEASED FOR PUBLICATION, 19-  
**AMP** AMP HOLLAND B.V.  
's-Hertogenbosch,  
The Netherlands.

NAME  
CONTACT ASSEMBLY-PIN  
TYPE XI, SIZE 20 LOOSE PIECE