

	Ŧ	D	п	m	0



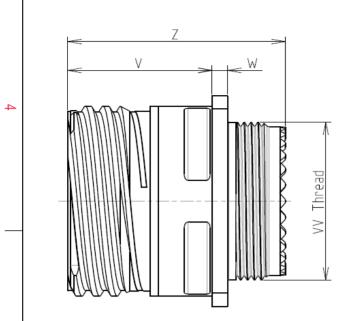

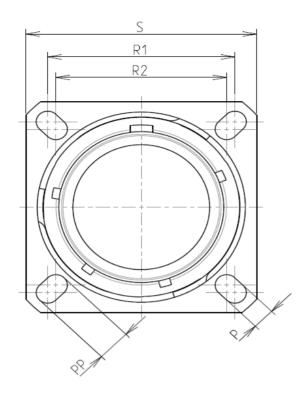

LAYOUT SHOWN AS

Keying Shown as example

L

С

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite				
-Shell Plating	: Without Plating				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum				
-Durability	: 500 Mating cycles				
-Delivered without Souriau contacts					
-Temperature Range	-65°C to +175°C				
-Salt Spray	: 2000 hours				

8D 0

G

13

Х

03

Ρ


F


Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M18x1-6g

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 13-03



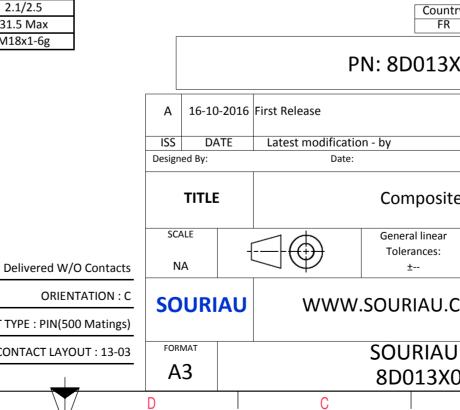

Φ		А				
				4		
S EXAMPLE				3		
any non-conformity or damage which does not comply with or of the Parties or by a third party adation, technical notice.)						
untry Juriso FR	diction & Control Not Listed	List		2		
3X03PCL						
	CUSTOMER D		/IOD N°			
site Receptac	e Receptacle 8D series					
ar	NPRDS / PR 859	OJECT				
This document is the property of						
J.COM SOURIAU it must not be reproduced or communicated without permission						
U DRG N°			SHEET			
X03PCL-C		A	1/2			
-	1					

-	Ŧ	۵	гт —	m	D	0	
		Contact Layout				SQUARE FLANGE RECEPTACLE (TYPE REAR MOUNTING	Panel Cuto
4		3#16			بر ۷		
	Ctc A B C	13-03 X Y 2.39 1.47 0 -2.79 -2.39 1.47			<u>v</u>	[Dim
ω						<u> </u>	ØA ØAA R1 ØT
	-					SOURIAU shall not I due to a use of t the Specifications issu (professional	he Products w ued by either c I recommenda
N						PN:	Count FR : 8D013
					A 16-10-2 ISS DATE Designed By:	016 First Release Latest modification - Date:	by
_					TITLE SCALE NA		Composit General linear Tolerances: ±
					SOURIA	U www.sc	DURIAU.(
					FORMAT A3	3	OURIAL 8D013X
	Н	G	F F	E	D	C	

