

ITEM	PART#	DESCRIPTION	QTY	UOM
A, B	511101060	10CKT CRIMP REC HOU WITH LOCKING FEATURE	2	PC
C	503948055	2mm MGrid WTB Crimp Term PhBr 2.5Sn	20	PC
D	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B9	1X24AWG DISC SR-PVC BK UL10002	BLACK
A2	B10	1X24AWG DISC SR-PVC BK UL10002	BLACK
A3	B7	1X24AWG DISC SR-PVC BK UL10002	BLACK
A4	B8	1X24AWG DISC SR-PVC BK UL10002	BLACK
A5	B5	1X24AWG DISC SR-PVC BK UL10002	BLACK
A6	B6	1X24AWG DISC SR-PVC BK UL10002	BLACK
A7	B3	1X24AWG DISC SR-PVC BK UL10002	BLACK
A8	B4	1X24AWG DISC SR-PVC BK UL10002	BLACK
A9	B1	1X24AWG DISC SR-PVC BK UL10002	BLACK
A10	B2	1X24AWG DISC SR-PVC BK UL10002	BLACK

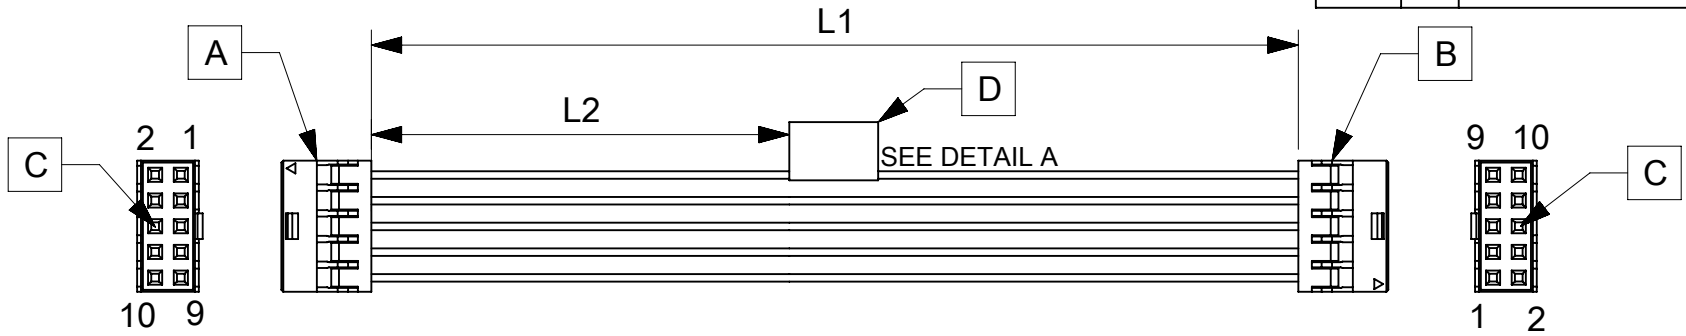


TABLE			
PART NUMBER	L1	L2 (REF)	TITLE
2185091100	50±3	13	MILLI-GRID DR R-R 10CKT 50MM DISC Sn
2185091101	100±5	38	MILLI-GRID DR R-R 10CKT 100MM DISC Sn
2185091102	150±8	63	MILLI-GRID DR R-R 10CKT 150MM DISC Sn
2185091103	300±10	138	MILLI-GRID DR R-R 10CKT 300MM DISC Sn
2185091104	600±10	288	MILLI-GRID DR R-R 10CKT 600MM DISC Sn

NOTES

1. Cable assembly must pass 100% for continuity and polarity.
2. Connector view shown is from mating side.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
31/05/2021	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{E}{A} = 0$ $\frac{E}{E} = 0$ $\frac{E}{P} = 0$ DIVISIONAL SYMBOLS	DIMENSION UNITS: mm SCALE: NTS		CURRENT REV DESC:		
	GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 665608		
	ANGULAR TOL ± °		DRWN: ARAJU 2021/05/31		
	4 PLACES ±		CHK'D: RDESAI01 2021/05/31		
3 PLACES ±		APPR: RDESAI01 2021/05/31		PRODUCT CUSTOMER DRAWING	
2 PLACES ±		INITIAL REVISION:		DOCUMENT NUMBER	
1 PLACE ±		DRWN: ARAJU 2021/05/31		2185091100	
0 PLACES ±		APPR: RDESAI01 2021/05/31		PSD 000 A	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER
			A4-SIZE	218509	CUSTOMER
					GENERAL MARKET
					SHEET NUMBER
					1 OF 1