


REV. 0

DCO 16707

COIL: @ 25°C	
RESISTANCE	675 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	2.3 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES: OPERATE & RELEASE 6 MS MAX.	
CONTACT BOUNCE 1 MS MAX.	

CUSTOMER DATA SHEET

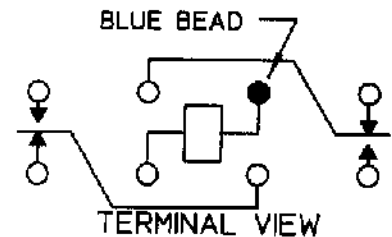

CONTACT RATING: 2A 28 VDC  
RESISTIVE 100,000 OPERATIONS

DR. PBB. 1/5/01 CK.TLG 1-5-01

**CI Technologies**  
advanced control electronic solutions

CUST. OPL	"FW" RELAY
CUST. NO. M5757/10-037	REV.

FW1167G06