Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr plug EM Pulse tone 24VAC/DC RD



i

run No	699.810.75	
Series:	Kompakt 37	
MECHAN	ICAL DATA	
Height		107 mm
Diameter		38 mm
Materials		PC
Dome colour		Clear
Housing colour		Black
Protection category		IP65
Connection		M12 plug 5-pole
Cable entry		Membrane grommet
Cable entry minimum		d = 1 mm
Cable entry maximum		d = 9 mm
Cable length		150 mm
Tension relief		Pull-out protection
Type of fixing		Built-in mounting
Working temperature minimum		-20°C
Working temperature maximum		+50°C
Weight with packaging		100 g
Product weight		60 g
ELECTRIC	AL DATA	
Operating voltage		24V
Operating voltage type		AC/DC
Operating voltage frequency		50Hz
Operating voltage tolerance		+/- 10%
Rated operational voltage		24 VDC
Rated operational current		55 mA
Rated inrush current		500 mA
Protection class		Protection class 2
Pollution degree		3
		In the connection area: 2
OPTICAL	DATA	
Light source		LED
Light colour		Red
Optical signal image		Permanent
Service life optical		50,000 h maximum
ACOUSTI		
	max) at 1m distance	85,0 dB (A)

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr plug EM Pulse tone 24VAC/DC RD


Audio frequency	3000 Hz			
Acoustic service life	5,000 h minimum			
APPROVAL DATA				
Conforms with CE	Yes			
WEEE	Yes			
Conforms with ATEX-directive	No			
Conforms with CCC	No			
Conforms with UL	cULus			
UL Type Rating	Type 12			
	Type 4X			
Conforms with FCC	No			
Conforms with IC	No			
EAC certificate available	Yes			
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)			
Conforms with AS-I	No			
ICAO Certification	No			
Conforms with DNV	No			
Conforms with RoHS CN	No			
Conforms with VdS	No			

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr plug EM Pulse tone 24VAC/DC RD

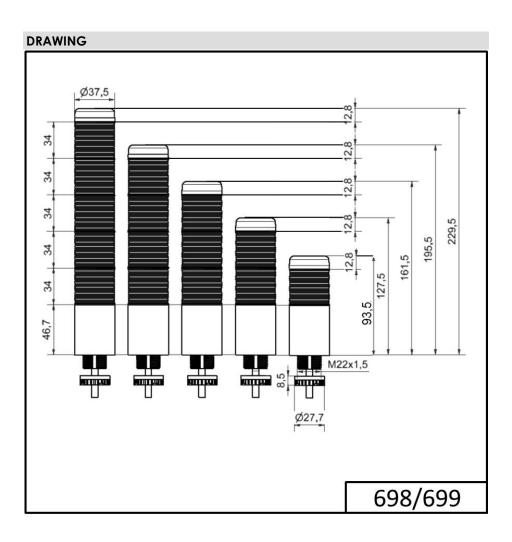

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.