


RoHS COMPLIANT

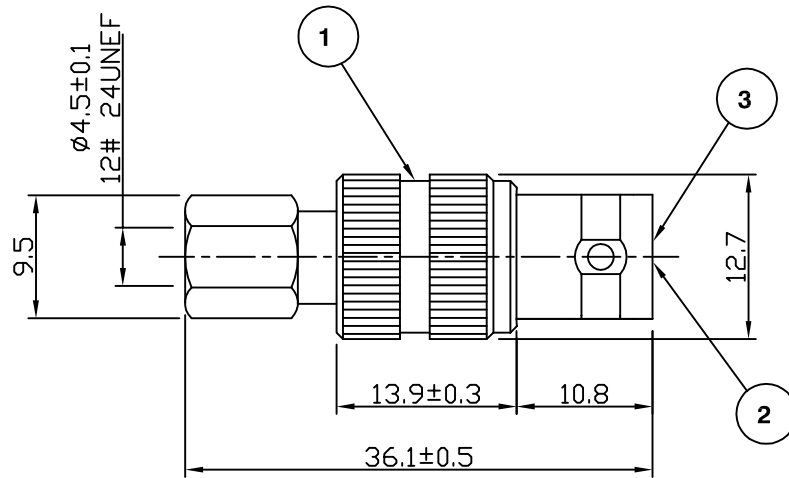

Electrical Characteristics

Nominal Impedance: 50 ohms
 Frequency Range: DC to 1 GHz
 VSWR: 1.3:1 maximum

Mechanical Characteristics

Mating Cycles: 500 cycles minimum
 Interface Dimensions: Conform to MIL-C-39012

Environmental Characteristics

Temperature Range: -55 °C to +85 °C

	PART	DESCRIPTION
1	Body	Brass, nickel plated
2	Contact	Brass, Gold plated
3	Dielectric	Delrin

Layout update	JT	2	05 Aug 10
First Issue	AT	1	26 Sep 94
DESCRIPTION OF REVISION	APPVD	ISS	DATE



Cinch Connectivity Solutions
 7-13 Russell Way,
 Widford Industrial Estate,
 Chelmsford, Essex,
 CM1 3AA, UK.
 Tel: +44 (0) 1245 359515
 Fax: +44 (0) 1245 358938

SCALE: Not To Scale

DIMENSIONS: mm

TOLERANCES:
 ± 0.2mm unless
 otherwise stated

DRAWN BY:

A Tatner

CHECKED BY:

A Tatner

APPROVED BY:

I Sparkes

DATE:

26 Sep 94

TITLE:

Twist-On BNC Jack
 for RG58

PART NUMBER:

TOBNC30-58

PAGE: 1 of 1