

6 5 4 3 2 1


E

D

C

B

A

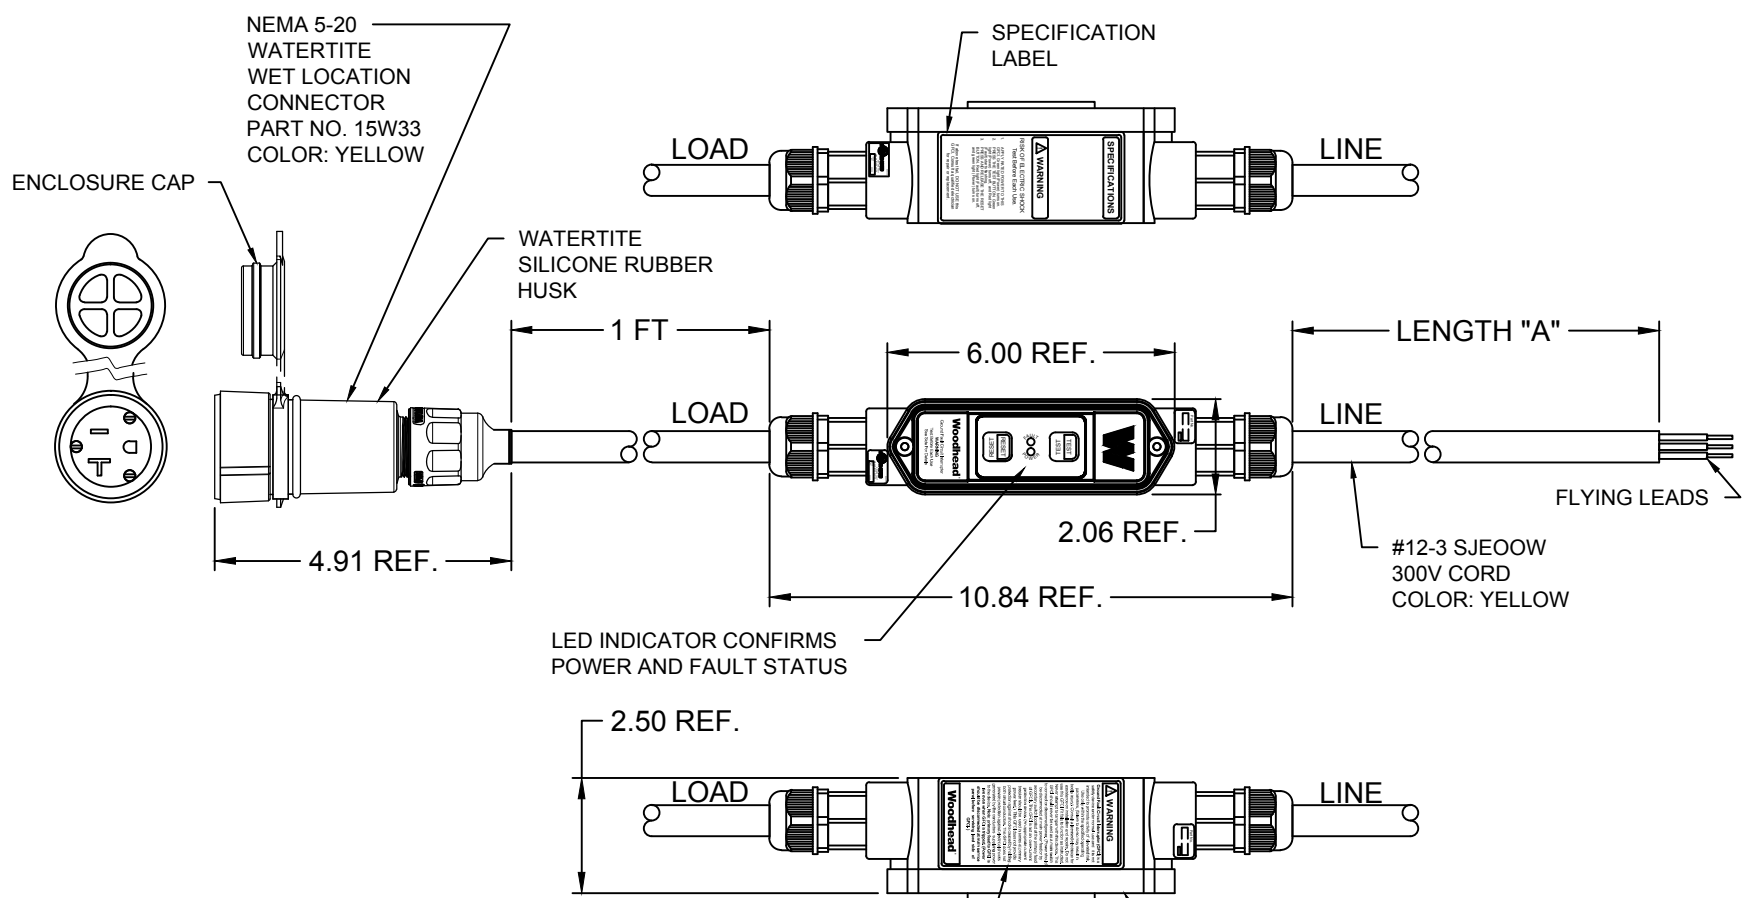

TECHNICAL:
 RATED VOLTAGE: 120VAC
 OPERATING VOLTAGE RANGE: 85% TO 110% OF RATED
 CURRENT: UP TO 20 AMPS OR DEVICE RATING
 FREQUENCY: 60Hz
 TRIP LEVEL: 5 ± 1mA
 PHASE: SINGLE
 RESPONSE TIME: 25 MS MAX.
 AGENCY APPROVAL: NONE

WARNING LABEL
 RUGGED, RAINPROOF, UV-STABILIZED ENCLOSURE RESISTS ABUSE, SUNLIGHT, OILS AND CHEMICALS

MATERIAL NO.	ENGINEERING NO.	LENGTH "A"	POWER-UP
1301530278	20052-0PM18	17 FT	MANUAL
1301530280	20052-0PM30	30 FT	MANUAL
1301530281	20052-0PM45	45 FT	MANUAL
1301530282	20052-0PM60	60 FT	MANUAL

ADD PARTS -280, 281, & 282	DESCRIPTION
EC NO: IFC2019-0185	
DRWN: BPATTERS 10/22/18	
CHKD: ---	
APPR: HKNEELAN 2018/03/28	
REV C	

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm INCH
4 PLACES	±--- ±---
3 PLACES	±--- ±---
2 PLACES	±--- ±---
1 PLACE	±--- ±---
ANGULAR ±.5°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE INCH ONLY	
DRAWN BY	DATE
BPATTERS	2018/03/20
CHECKED BY	DATE
DWILLIAM	---
APPROVED BY	DATE
HKNEELAN	2018/03/28
MATERIAL NO.	
SIZE A	

SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
TITLE		
120 VAC 20A IN-LINE GFCI MANUAL 17' FLYING LEADS 1' SECONDARY NEMA 5-20		
MOLEX INCORPORATED		
MATERIAL NO.	DOCUMENT NO.	SHEET NO.
	SD-130153-278	1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

6 5 4 3 2 1