



.XX ±0.13 .XXX ±0.05





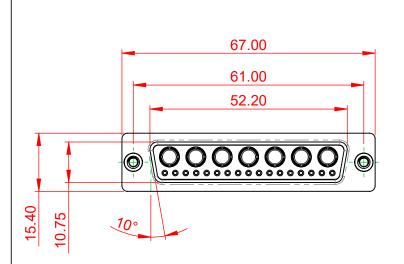



NOTES:


MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, Sn or Ni PLATED CONTACT: COPPER ALLOY SEE ORDERING GUIDE FOR PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C


SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. INSULATOR RESISTANCE: $5000M\Omega$ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

| | | SW REFERENCE NO.: 628 COMBO ASSEMBLY | | | |
|--------------------------------------|---|--------------------------------------|------------|-------|--|
| COMBINATION | DRAWN: C.B | DATE: JAN. 01/20 | 19 | | |
| | | CHECKED: | DATE: | | |
| EDAC INC | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND | SCALE: (IN C.A.D. 1:1) | SHEET 1 OF | 4 | |
| YOUR CONNECTION TO QUALITY & SERVICE | SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | DRAWING NUMBER: 628-24W7224-3TD | | ISSUE | |
| | | PART NUMBER: 628-24W | 7224-3TD | 1 | |





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. OR PLATING

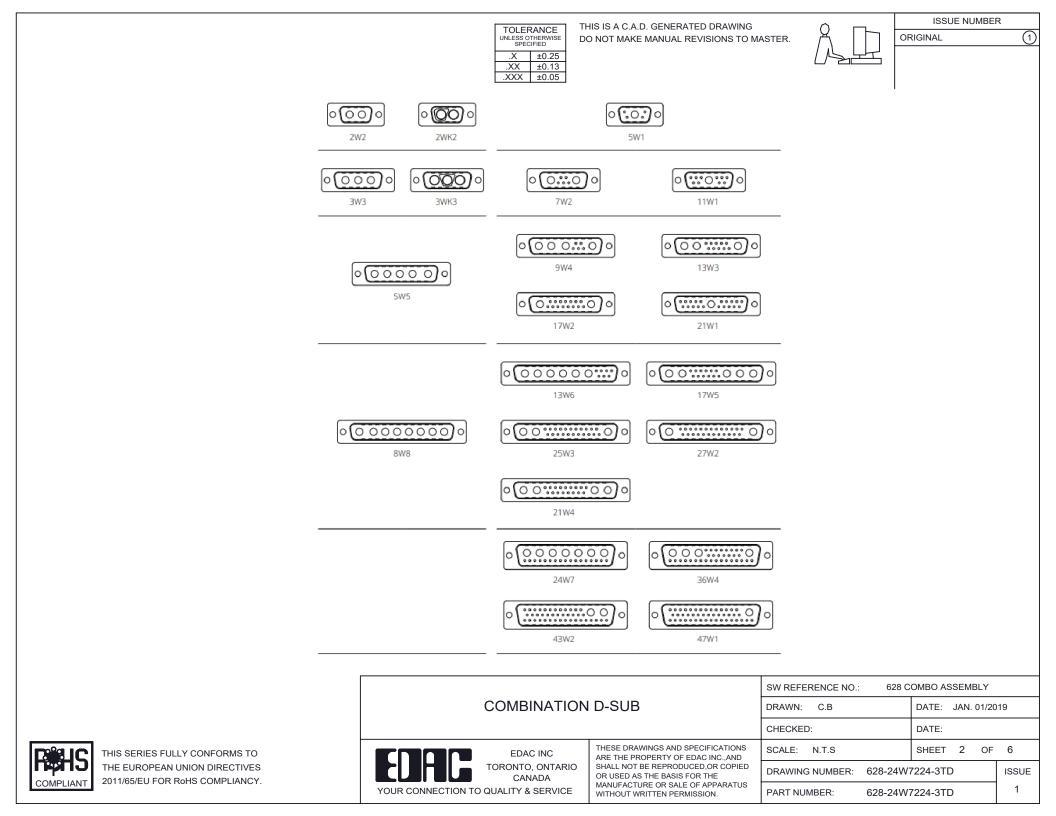

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25 .XX ±0.13 .XXX ±0.05



2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female





(1)


21W4 Male/Female



27W2 Male/Female




21W1 Male/Female



| | | SW REFERENCE NO.: 628 COMBO ASSEMBLY | | | |
|----------------------------|--|--------------------------------------|------------------|-------|--|
| COMBINATION | D-SUB | DRAWN: C.B | DATE: JAN. 01/20 | 19 | |
| | | CHECKED: | DATE: | DATE: | |
| EDAC INC | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | SCALE: N.T.S | SHEET 3 OF | 4 | |
| TORONTO, ONTARIO CANADA | | DRAWING NUMBER: 628-24W7224-3TD ISS | | ISSUE | |
| TO QUALITY & SERVICE | | PART NUMBER: 628- | -24W7224-3TD | 1 | |

5W5 Male

5W5 Female




23.53


8W8 Male

8W8 Female

31.76



YOUR CONNECTION




11W1 Male/Female



17W2 Male/Female

CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



 TOLERANCE UNLESS OTHERWISE
 THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

 .X
 ±0.25







25W3 Male












36W4 Female



13W3 Male



36W4 Male







13W6 Male



43W2 Male






.XX ±0.13 .XXX ±0.05

9W4 Female

13W3 Female



43W2 Female

47W1 Female



17W5 Male


COMPLIANT






2.77







| | | SW REFERENCE NO.: 628 COMBO ASSEMBLY | | | |
|--|--|--|---------------------------------|------------|-------|
| | COMBINATION | DRAWN: C.B | DATE: JAN. 01/20 | 19 | |
| | | | CHECKED: | DATE: | |
| THIS SERIES FULLY CONFORMS TO | EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | SCALE: N.T.S | SHEET 4 OF | 4 |
| THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR R₀HS COMPLIANCY. | | | DRAWING NUMBER: 628-24W7224-31D | | ISSUE |
| | | | PART NUMBER: 628-24W | 7224-3TD | 1 |

····