


T340E686K025AS7301

Aliases (T340E686K025ASTR)

T340, Tantalum, MnO₂ Tantalum, Commercial Grade, 68 uF, 10%, 25 VDC, 900 mOhms, Lead Spacing = 10mm

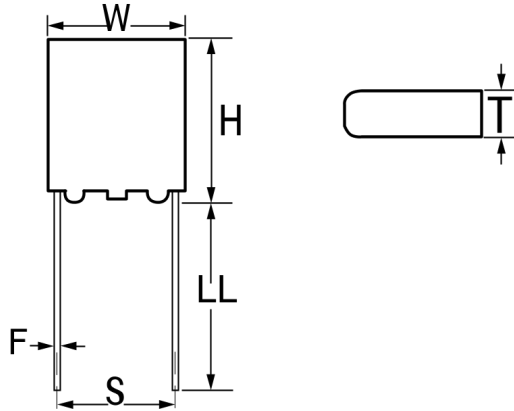

Click [here](#) for the 3D model.

Dimensions	
W	12.3mm MAX
H	10.5mm MAX
T	12.3mm MAX
S	10mm +/-0.5mm
LL	15mm +/-2mm
F	0.64mm +/-0.03mm

Packaging Specifications	
Packaging	T&R, 305mm
Packaging Quantity	150

General Information	
Series	T340
Dielectric	MnO ₂ Tantalum
Style	Radial Molded
Description	Radial, Solid Tantalum, Molded
RoHS	No
Prop 65	⚠ WARNING: Cancer and reproductive harm - http://www.p65warnings.ca.gov .
SCIP Number	a3b4e2e1-63ea-439e-a89a-743225502a7d
Termination	Lead (SnPb)
AEC-Q200	No
Construction	Molded
Miscellaneous	Includes Standoff Height of 0.38 +/- 0.13mm.
Notes	Longest Lead Is Positive.

Specifications	
Capacitance	68 uF
Capacitance Tolerance	10%
Voltage DC	25 VDC (85C), 16 VDC (125C), 0.25 VDC (125C Reverse)
Temperature Range	-55/+125°C
Dissipation Factor	6%
Resistance	0.9 Ohms (100kHz)
Leakage Current	10 uA