


.XXX ±0.05


DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

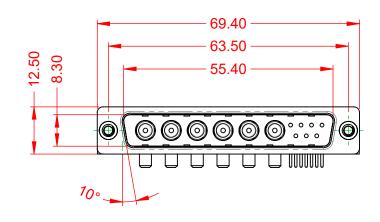




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED




OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	30A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.

1000V AC rms



	SW REFERENCE NO.: 629 COMBO AS:		OMBO ASSEMBLY		
COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19	
		CHECKED:		DATE:	
	C THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
	OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 629-13W	6240-3T4	ISSUE	
YOUR CONNECTION TO QUALITY & SE	RVICE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 629-13W	6240-3T4	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

COMPLIANT

