
		-
REV	ECO	
A1		

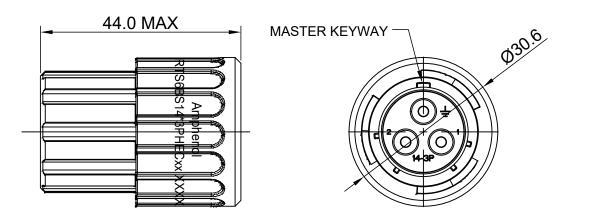

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MATERIAL:

SHELL: THERMOPLASTIC, UL94 V-0. INSERT: THERMOPLASTIC, UL94 V-0. COUPLING NUT: THERMOPLASTIC, UL94 V-0. O-RING: NBR OR SILICONE RUBBER. WASHER: SILICONE RUBBER. END CAP: THERMOPLASTIC, UL94 V-0. PLASTIC RING: THERMOPLASTIC, UL94 V-0. WIRE SEAL: SILICONE RUBBER.

2. SPECIFICATIONS:

2.1 RATED CURRENT: 45A (MAX).

2.2 RATED VOLTAGE: 600V(AC/DC).

2.3 OPERATING TEMPERATURE: SEE TABLE.

2.4 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN2 MILLIAMPS CURRENT LEAKAGE@2500 VOLTS AC.2.5 INSULATION RESISTANCE: 5000 MEGOHMS MIN.

2.6 IP CLASS: IP67 AND IP69K IN THE MATED CONDITION, WIRE SEALS FULLY POPULATED.

2.7 MATING CYCLES DURABILITY: 500 CYCLES MIN. 2.8 RoHS COMPLIANT.

3. SUITABLE CONTACTS : 8# CONTACT.

CONTACT SIZE	CONTACT PN	WIRE RANGE
8#	MP10A23xL	12 - 10AWG

IN THE CONTACT PN,"x" DENOTE DIFFERENT PLATING. 4. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY. SEALING PLUGS CAN BE -PURCHASED SEPARATELY

KEY	-2
N	RT

QUANTI	ΓY	PART NUMBER			
			Γ	MА	
UNLESS OTHERWISE SPECIFIED		SIGN	ATUR		
		DRAWN:	Blink		
	Angles ±1°	CHECKED:	Tod		
3) Note reference = X			ENGINEER:		
MATERIAL SPECIFICAT		TIONS:	APPROVAL:	Tommy	
			CUSTOMER:		
PROCESS SPEC	FICA	TIONS:	THIS DRAWING IS SUPPL INFORMATION ONLY. DE SPECIFICATIONS AND PE SHOWN HEREON ARE TH THE AMPHENOL CORPOI OF REPRODUCTION ARE DIMENSIONS ARE SUBJE		
NEXT ASS'Y:			MANUFACTURING VARIA		

