


PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR
 USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY
 PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/17/02	BS
B	UPDATE CORSET DIMENSIONS	07/29/02	BS
C	UPDATE CONDUCTOR TERMINATION TABLE	10/29/02	BS

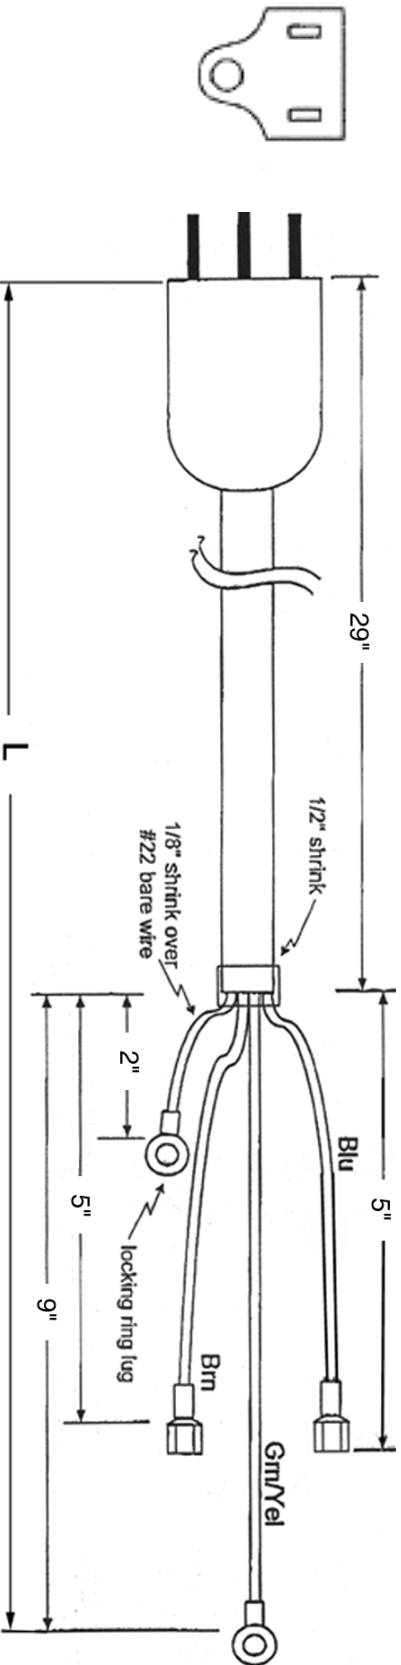

GENERAL SPECIFICATIONS:

CABLE TYPE / SIZE: S.J.T. # 14 AWG, 3 CONDUCTOR, WITH OVERALL FOIL SHIELD AND DRAIN WIRE
 TEMPERATURE RATING: 105° C
 CONDUCTOR COLORS: BLUE / BROWN / GREEN/YELLOW
 CABLE JACKET COLOR: BLACK
 OVERALL LENGTH (L): 965 ± 50 MM (3 FT 2 INCH)
 CABLE OUTER DIAMETER: 10.0 ± 0.5 MM (0.38 IN)
 END 'A' PLUG: NEMA 5-15P
 END 'B': SEE TERMINATION TABLE
 APPROVALS PLUG: U.L., CSA
 APPROVALS CABLE: U.L., CSA

PACKING:

BULK PACKED, BUNDLES OF 25.
 MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

CONDUCTOR TERMINATION TABLE:

WIRE	COLOR	ROJ ± 5 mm	RIJ ± 1 mm	TERMINAL
NEUTRAL	BLUE	127	-	Fully insulated, Faston for .032 x0.250"tab, Amp 3-520116-2 or equiv.
LINE	BROWN	127	-	Fully insulated, Faston for .032 x0.250"tab, Amp 3-520116-2 or equiv.
GROUND	GREEN/YELLOW	230	-	Ring #8 stud , insulated, Panduit PV14-8R-C or equiv.
DRAIN	BLACK/SHRINK	50	-	Locking Ring #8 stud , Amp 640204-1 or equiv.

NOTES:

1. CORD AND PLUG MUST BE MARKED WITH APPROVAL SYMBOLS AND/ OR FILE NUMBERS.



DASH NO.	PART NO.	REV.	DESCRIPTION	NOTES
			TABULATION BLOCK	

TABULATION BLOCK

REV.	C	DATE:	TOLERANCES:	SIZE
SHEET 1		07/17/02	DECIMALS ANGULAR xx +/- .01 .xx +/- .005	A
INTBY: EM		07/17/02	MILLIMETERS ANGULAR xx +/- .03 xx +/- .013	
DRAWN: NF		07/17/02	FSCN No.: G, CC	
APRVD: BS		07/17/02	SCALE: NONE	



186 Veterans Dr. Northvale, NJ 07647
 Tel 201-784-1000 Fax 201-784-0111

DWG TITLE: 120 V LINE CORD ASSY, SHIELDED

PART NO: 3011863F2DDRR

SHEET 1/1