


TOLERANCE UNLESS OTHERWISE SPECIFICATION OF MAKE MANUAL REVISIONS TO MASTER.





(1)

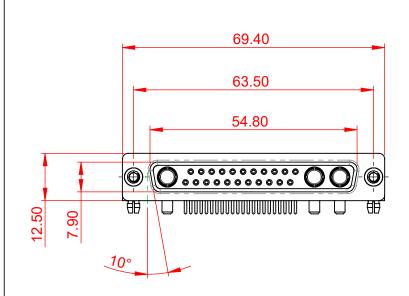





.X ±0.25 .XX ±0.13

.XXX ±0.05


MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, TIN PLATED CONTACT: COPPER ALLOY, GOLD FLASH PLATING


OPERATING TEMPERATURE: -55°C ~ 125°C

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. INSULATOR RESISTANCE: $5000M\Omega$ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms


CONTACT CODE 40 POWER CONTACT FOOTPRINT - 13.20mm 40 IS STANDARD AS SHOWN ON SHEETS 3 & 4 CONTACT CODE 50 POWER CONTACT FOOTPRINT - 20.33mm

ŗ		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
ļ	COMBINATION	DRAWN: C.B	DATE: JAN. 01/207	19	
ļ			CHECKED:	DATE:	
ŗ	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4
	TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-25W3250-2T3		ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-25W	3250-2T3	1

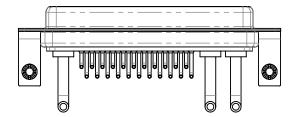



R, UL94V-0

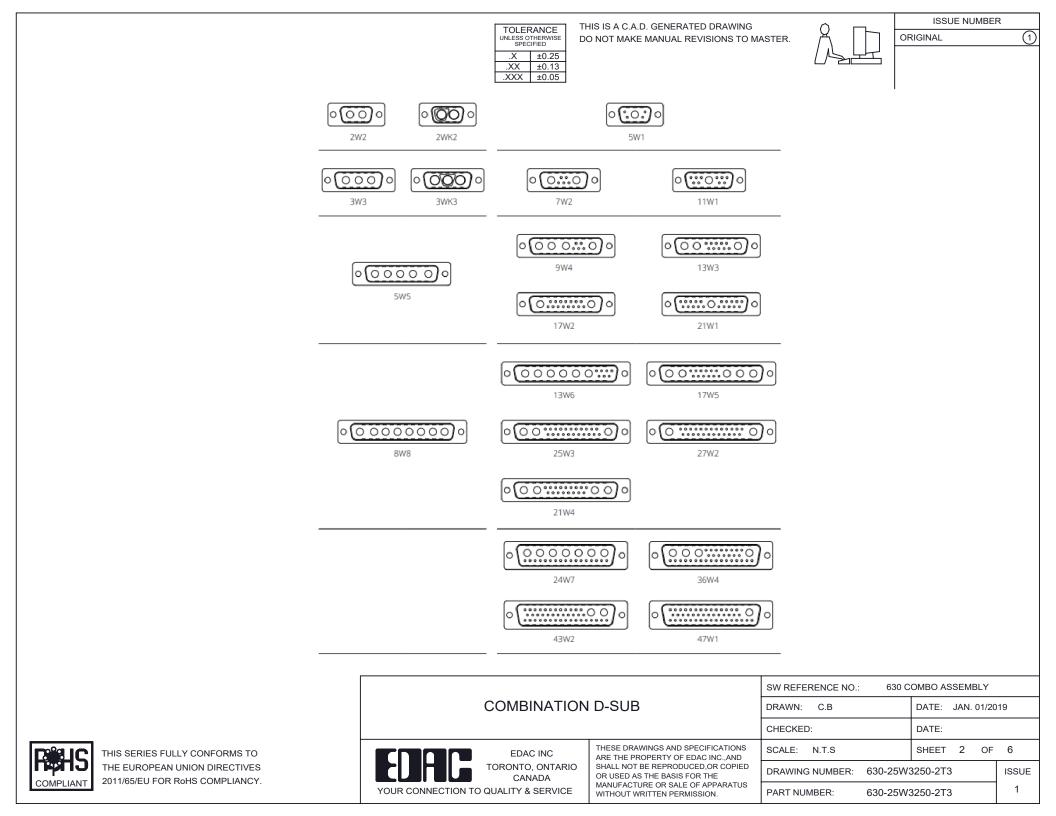



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

 $\overline{(1)}$

2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female





5W5 Male

COMPLIANT




PCB EDGE






PCB EDGE



27W2 Male/Female

21W4 Male/Female




21W1 Male/Female



		SW REFERENCE NO.: 630 COMBO ASSEMBLY				
	COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:	E:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: N.T.S	SHEET 3 OF	4	
	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-25W	3250-2T3	ISSUE	
			PART NUMBER: 630-25W	3250-2T3	1	


5W5 Female



8W8 Female


CURRENT RATING / ØA

10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2




PCB EDGE

17W2 Male/Female



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



PCB EDGE

11W1 Male/Female

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.















13W3 Male





25W3 Male





2.77

24.77

23.36

PCB EDGE

PCB EDGE

31.75

32.00

15.50

2.77

PCB EDGE

21.9

36W4 Female



13W6 Male



2.77

PCB EDGE



13W6 Female

.X ±0.25 .XX ±0.13 .XXX ±0.05

43W2 Female




17W5 Male







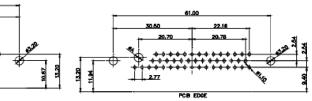

	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:		
THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: N.T.S	SHEET 4 OF	4	
	TORONTO, ONTARIO CANADA		DRAWING NUMBER: 630-25W3250-2T3		ISSUE	
COMPLIANT 2011/65/EU FOR RoHS COMPLIANCY.	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-25W	3250-2T3	1	

30.50

2.77

22.16

22.16

2.77

20.78

20.7

13.72

PCB EDGE

PCB EDGE



13W3 Female



