## Completely pre-assembled Signal Towers / KOMPAKT 37 K37 cable EM Pulse tone 24VAC/DC GN/YE/R



i

Part No.:	699.110.75	
Series:	Kompakt 37	
MECHAN	ICAL DATA	
Height		175 mm
Diameter		38 mm
Materials		PC
Dome colour		Green Red Yellow
Housing colour		Black
Protection category		IP65
Connection		Cable
cross-sectional area maximum		m 0,34mm² / 22AWG
Cable entry		Membrane grommet
Cable entry minimum		d = 1 mm
Cable entry maximum		d = 9 mm
Cable length		2000 mm
Tension relief		Pull-out protection
Type of fixing		Built-in mounting
Working temperature minimum		Jm -20°C
Working temperature maximum		um +50°C
Weight with packaging		198 g
Product weight		165 g
ELECTRIC	AL DATA	
Operating voltage		24V
Operating voltage type		AC/DC
Operating voltage frequency		y 50Hz
Operating voltage tolerance		e +/- 10%
Rated operational voltage		24 VDC
Rated operational current		125 mA
Rated inrush current		500 mA
Protection class		Protection class 2
Pollution degree		3 In the connection area: 2
OPTICAL	DATA	
Light source		LED
Light colour		Green Red Yellow
Optical signal image		Permanent
Service life optical		50,000 h maximum

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

## Completely pre-assembled Signal Towers / KOMPAKT 37


K37 cable EM Pulse tone 24VAC/DC GN/YE/R

ACOUSTIC DATA	
Volume (max) at 1m distance	85,0 dB (A)
Acoustic signal image	Pulse tone
Audio frequency	2900 Hz
Acoustic service life	5,000 h minimum
APPROVAL DATA	
Conforms with CE	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Туре 12 Туре 4Х
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

Completely pre-assembled Signal Towers / KOMPAKT 37 K37 cable EM Pulse tone 24VAC/DC GN/YE/R

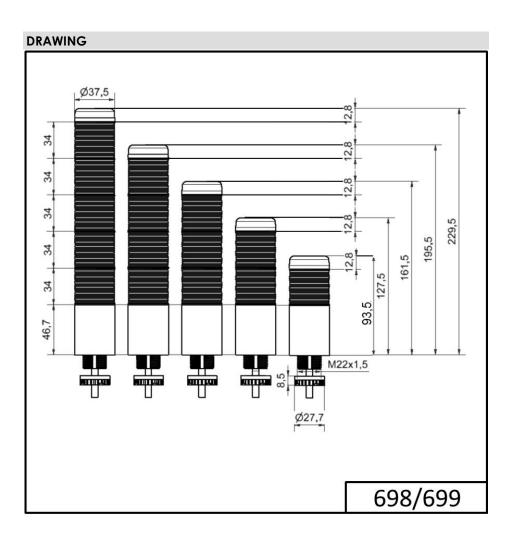

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.