
<b>— — — —</b>	G	TT	m	0





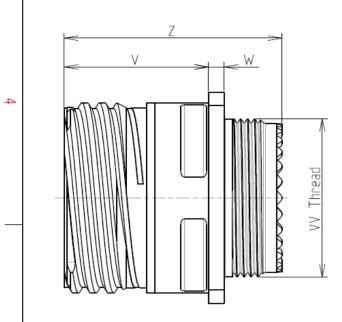

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium -Shell Plating : Black Zinc Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +175°C

: 500 hours

8D 0

G

13

Ζ

03

Ρ


F

В

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
РР	4.93±0.2			
R1	23.01			
R2	20.62			
S	28.6±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M18x1-6g			

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

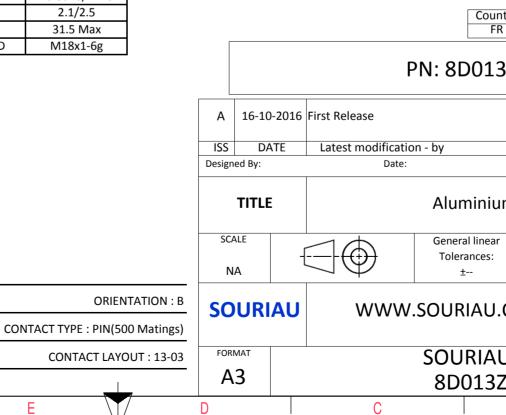

	σ			A			
A		0				4	
	6/12						
	· .						
		1					
	-						
AS EXA	AMPLE					3	
r any i	non-conformit	ty or dar	nage				
	which does not comply with of the Parties or by a third party						
	on, technical n						
untry	Jurisd		Control List		]		
FR		Not Li	sted			2	
.3Z(	03PB						
						-	
		CUST	OMER DRAW	ING	MOD N°		
um	Receptacl	e 8D	series				
						_	
ar :		NP	RDS / PROJEC <b>859</b>	T			
		TI	his document is t		ty of	1	
J.CC	COM SOURIAU it must not be reproduced or						
	communicated without permission           DRG N°         SHEET						
	3PB-C				1/2		
	B			Α		J	

03     Image: state of the first conduction of the state of or the state of or the state of or the state of or the state of the state o		<b>工</b>	۵	н <b>г</b>	m	D	0	
A → 3416 → <u>A 2.33 1.47</u> → <u>A 1 6 10 2016 inst Relevant</u> → <u>D 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 </u>			Contact Layout					Panel Cuto
13-03       Image: Constraint of the second se	4					2	R1 >	νε ο)
Co		A B	13-03           X         Y           2.39         1.47           0         -2.79					ØA
No Control of the second secon	ى							ØA ØAA R1
No Control of the second secon		F						
PN: 8D013         A       16-10-2016         ISS       DATE         Latest modification - by         Designed By:       Date:         TITLE       Aluminiu         SCALE       Image: SCALE         NA       Image: Scale         SOURIAU       WWW.SOURIAU.         FORMAT       SOURIAU         A3       8D0132							due to a use of the Specifications iss	the Products w sued by either o
A 16-10-2016 First Release ISS DATE Latest modification - by Designed By: Date: TITLE Aluminiu SCALE General linear Tolerances: *	N							Count FR
ISS       DATE       Latest modification - by         Designed By:       Date:         TITLE       Aluminiu         SCALE       Image: SCALE         NA       Image: Scale         SOURIAU       WWW.SOURIAU.         FORMAT       SOURIAU         A3       SOURIAU							PN	J: 8D013
Designed By:     Date:       TITLE     Aluminiu       SCALE     Image: SCALE       NA     Image: Scale       NA     Image: Scale       SOURIAU     WWW.SOURIAU.       FORMAT     SOURIAU       A3     SOURIAU						A 16-10	2016 First Release	
SCALE NA SOURIAU SOURIAU FORMAT A3 SOURIAU A3 SOURIAU A3 SOURIAU								ь ру
NA TOIErances: t SOURIAU WWW.SOURIAU. FORMAT A3 BD0132						TITLE		Aluminiu
FORMAT SOURIAU A3 8D0132	-							Tolerances:
A3 8D0132						SOURI	AU WWW.S	OURIAU.
								SOURIAU 8D0137
$\mathbb{V}$	l	Н	G	F	E	1		

