

Rev	AWO #	Description	Date	Appr
-		RELEASED	01/23/14	

6

5

4






3

2

1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

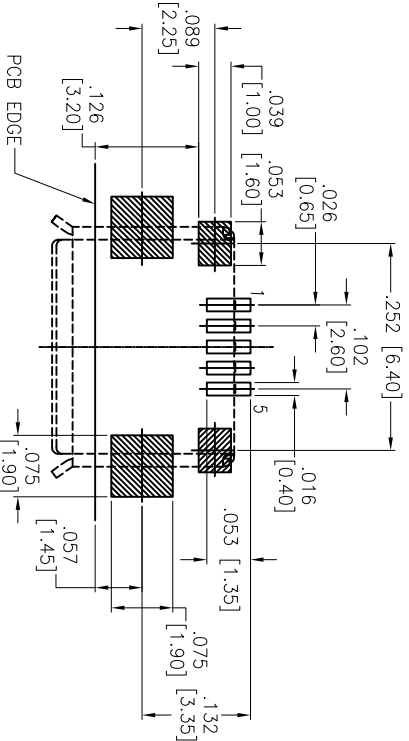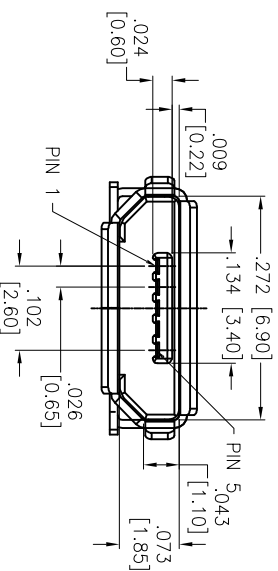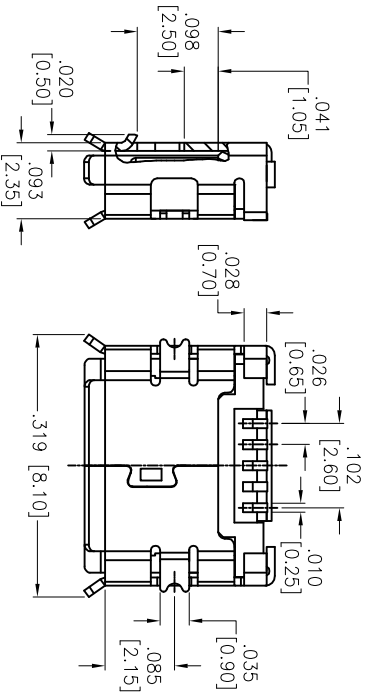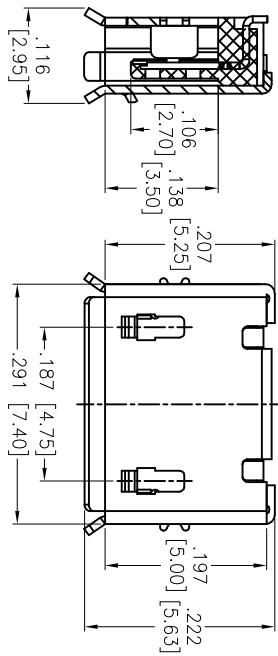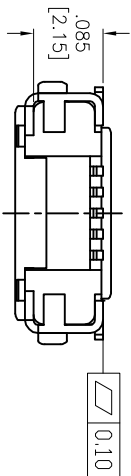

**SPECIFICATIONS:**

- Material:** Insulator: Hi-temp thermoplastic, rated UL 94V-0
- Insulator color:** Black
- Contacts:** Copper Alloy
- Shell:** Copper Alloy, Nickel plated
- Plating:** Gold over Nickel underplate in contact area, Matte Tin or over Nickel underplate on solder tails
- Electrical:** Current rating: 1A Max. Contact resistance: 50 milliohms max. Insulation resistance: 100 Megohms min. Dielectric withstand voltage: 100 VAC for 1 minute
- Temperature Rating:** Operating temperature: -30°C to +80°C
- Environmental:** Lead free, RoHS compliant.

PACKAGED ON TAPE & REEL

**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

**MICRO USB, TYPE B, SINGLE PORT**  
**FEMALE, TRUE SMT TYPE, TAPE & REEL**

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	± .10
.XX ± .020	± .015
.XXX ± .015	± .010
APPROVALS	DATE
DRAWN	HR
CHECKED	YC
APPROVED	

SIZE	PART NO.	REV.
X	MCR-B-S-RA-TSMT-NP-CS4-T/R	-
REF: S00097C	SCALE: NTS	SHEET 1 OF 1

A

B

C

D

A

B

C

D

6

5

4

3

2

1

