




RECOMMENDED PCB HOLE LAYOUT

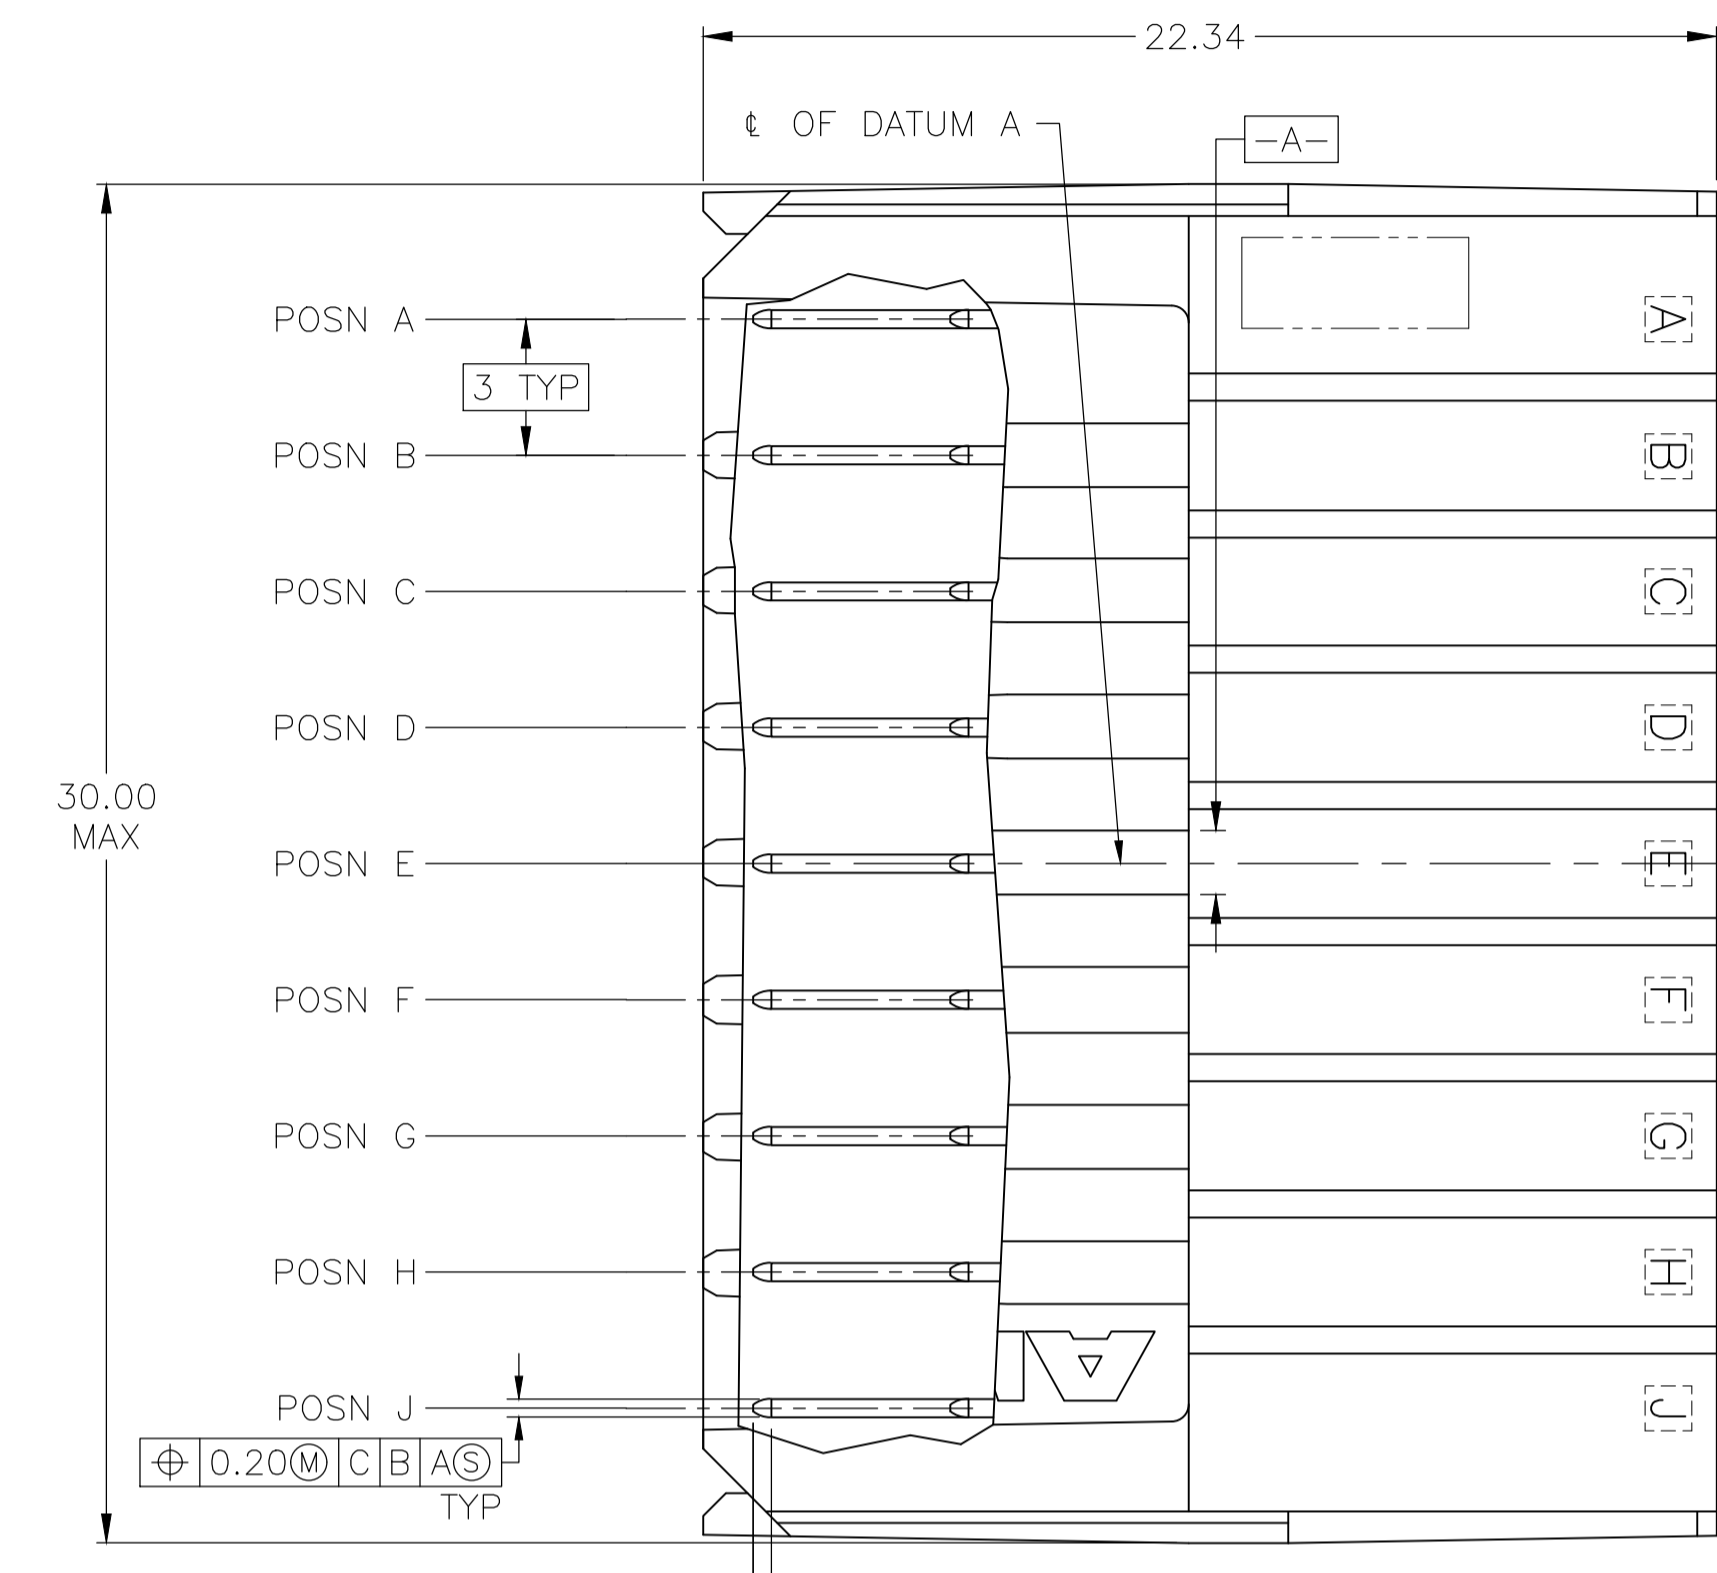

- 1 MATERIAL: HOUSING: POLYESTER, GRAY. UL 94V-0. CONTACT: HIGH CURRENT COPPER ALLOY.
- 2 FINISH: IN ACCORDANCE WITH PRODUCT SPECIFICATION 108-1651, GOLD PLATING OR EQUIVALENT PLATING ON PRODUCT CONTACT MATING AREA, AND MATTE TIN PLATING ON COMPLIANT PIN AREA, ALL OVER MATTE NICKEL UNDERPLATED. DETAIL PLEASE REFER TO PRODUCT SPECIFICATION 108-1651.
- 3 FINISH: CONTACT LUBRICATION WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 4 THE 10.26 ± 0.13 DIMENSION APPLIES IN THIS AREA.
- 5 REFERENCE APPLICATION SPEC 114-1103 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- 6. CURRENT RATING 16A/CONTACT PER PRODUCT SPEC 108-1651.

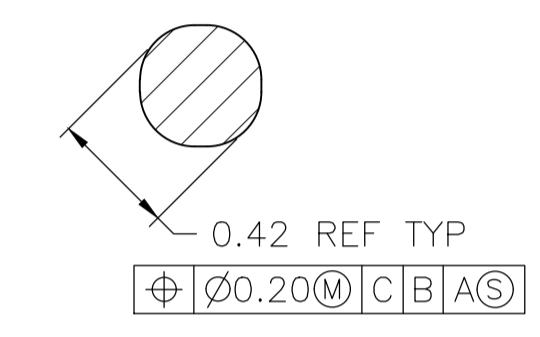

SECTION W-W
SCALE 40:1

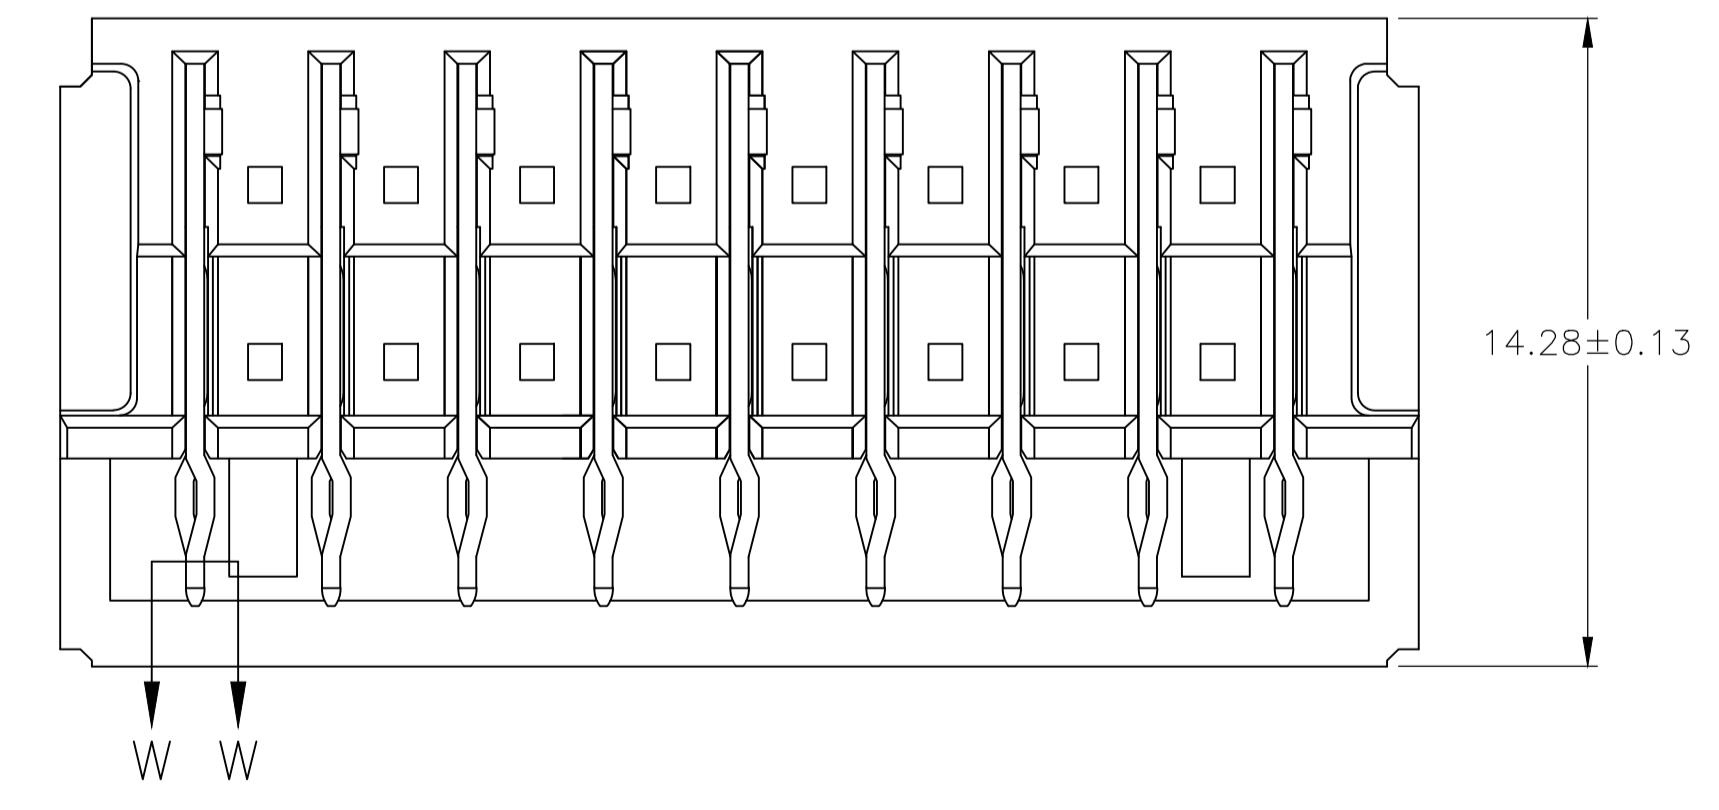

120959-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN B. CARBO 18OCT04	STE TE Connectivity	
DIMENSIONS: mm		CHK R. PATTERSON 18OCT04	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP'D R. PATTERSON 18OCT04	PRODUCT SPEC	
0 PLC ± -		108-1651		
1 PLC ± -		APPLICATION SPEC		
2 PLC ± 0.13		114-1103		
3 PLC ± -		SIZE	CAGE CODE	DRAWING NO
4 PLC ± -		A1	00779	120959
ANGLES ± -		WEIGHT	RESTRICTED TO	
			CUSTOMER DRAWING	
		SCALE	SHEET	REV
		6:1	1 OF 1	D2