



LOC F	DIST 7	REVISIONS			
P	LTR REV	DESCRIPTION MODIFICATIONS	DATE	DWN DESS	APVD APP.
	-	ER00-7761-99	01/99	BB	MF

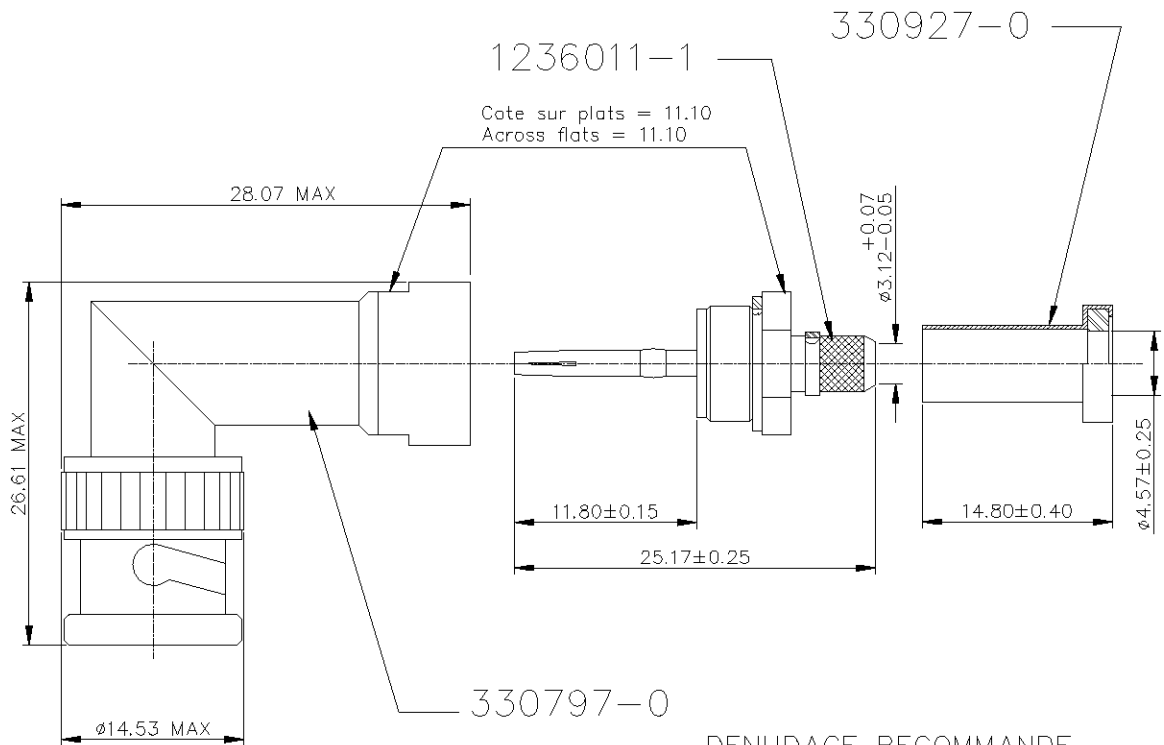

DENUDAGE RECOMMANDE
RECOMMENDED STRIP LENGTH

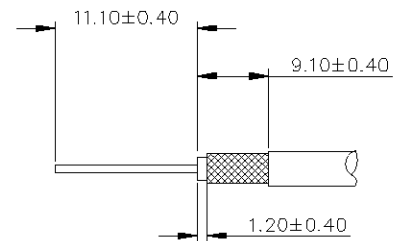

- 3 INSTRUCTION DE SERTISSAGE : IS 1799-5
INSTRUCTION SHEET : IS 1799-5
- 2 PINCE A SERTIR REF: 69140-1.
CRIMP WITH HAND TOOL P/N 69140-1.
- 1 UTILISER AVEC CABLE RG 58/U - RG 58B/U - RG 58C/U.
FOR USE WITH RG 58/U - RG 58B/U - RG 58C/U.

Part Number 2-135763-2
Reference 2-135763-2

RELEASED FOR PUBLICATION
 , 1996.
 THIS DRAWING IS UNPUBLISHED.
 DIFFUSION RESTREINTE AMP.
 BY AMP INCORPORATED.
 ALL RIGHTS RESERVED.
 TOUT DROITS RESERVES.
 COPYRIGHT 19

DIMENSIONS: MM	DWN/DESSINE BUON B.	14/09/98	MATERIAL MATIERE	-	FINISH FINITION	-
	CHK/VERIFIE LOUDIEUX G.	14/09/98	AMP DE FRANCE 95301 PONTOISE			
TOLERANCES UNLESS OTHERWISE SPECIFIED: TOLERANCES NON SPECIFIEES (SUIV NB DE DECIMALES)	APVD/APPROUVE FURIO M.	14/09/98				
0 PLC ±	PRODUCT SPEC SPEC. PRODUIT	108-12001	NAME CONNECTEUR COAX BNC COUDE 90° RIGHT ANGLE PLUG SINGLE CRIMP			
1 PLC ±	APPLICATION SPEC SPEC. APPLICATION	-	SIZE FORMAT	A4	GAGE CODE	00779
2 PLC ±	WEIGHT MASSE APPROX.	-	DRAWING NO TITRE	C=2-135763-2		RESTRICTED TO TITRE
3 PLC ±	CUSTOMER DRAWING/PLAN CLIENT		SCALE ECHELLE	*	SHEET FEUILLE	1 OF DE /1
4 PLC ±			REV	01		
ANGLES ±1°						