


THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25





ISSUE NUMBER

ORIGINAL

(1)





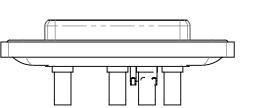

NOTES:

MATERIAL:

.XX ±0.13 .XXX ±0.05

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, NICKEL PLATED CONTACT: COPPER ALLOY, 5µ GOLD PLATING


OPERATING TEMPERATURE: -55°C ~ 125°C

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mQ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

		SW REFERENCE NO.: 628 COMBO ASSEMBLY			
COMBINATION	COMBINATION D-SUB		DATE: JAN. 01/20	19	
			DATE:		
EDAC INC TORONTO, ONTARIO YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4	
		DRAWING NUMBER: 628W9W4-122-3N2		ISSUE	
		PART NUMBER: 628W9W4	4-122-3N2	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

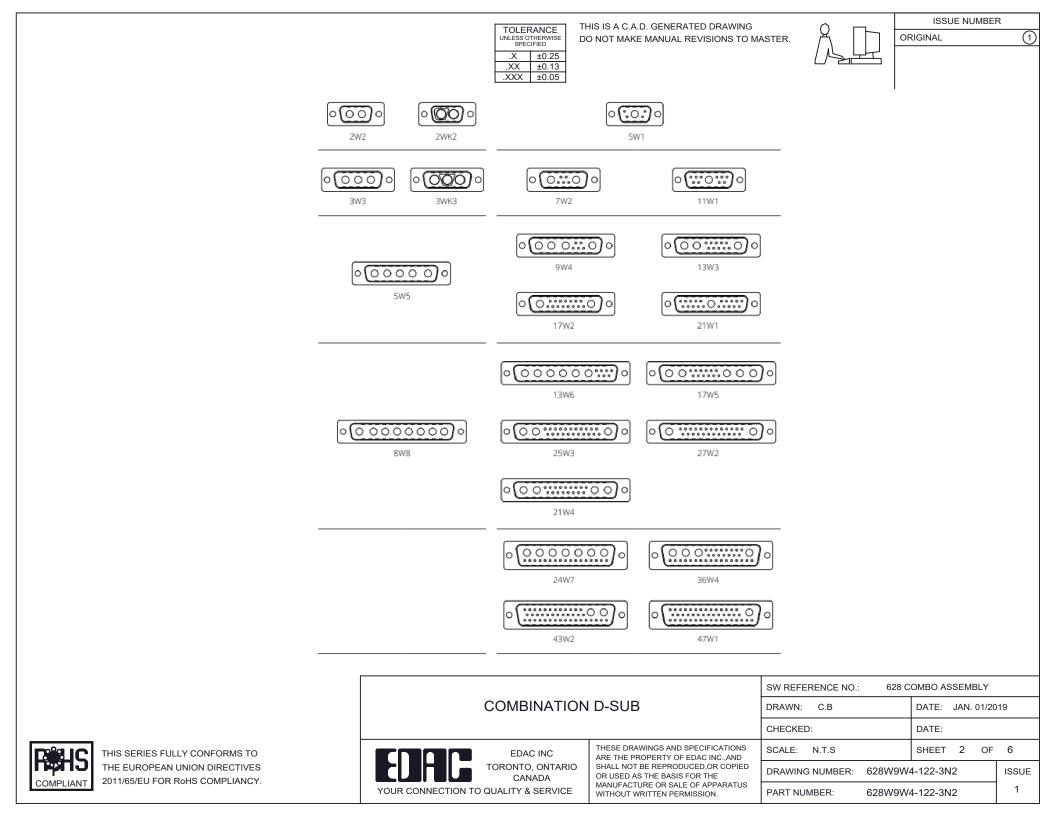

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25 .XX ±0.13 .XXX ±0.05



 $\overline{(1)}$


2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female






21W4 Male/Female



27W2 Male/Female




21W1 Male/Female



$\begin{array}{c} \downarrow \uparrow \oplus \oplus$						
		SW REFERENCE NO.: 628 COMBO ASSEMBLY				
		DRAWN: C.B	DATE: JAN. 01/2019			
		CHECKED:	DATE:			
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: N.T.S	SHEET 3 OF	4		
TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 628W9W	4-122-3N2	ISSUE		
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 628W9W	4-122-3N2	1		

5W5 Male

5W5 Female



47.05


23.53

8W8 Male


8W8 Female

31.76

22.83



22.97




11W1 Male/Female




17W2 Male/Female

8.31 9.70 22

CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2



COMPLIANT



THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25







25W3 Male










36W4 Female





13W3 Male

3


3












13W6 Male



43W2 Male






.XX

±0.13 .XXX ±0.05


9W4 Female

13W3 Female



43W2 Female

47W1 Female




17W5 Male






2.77








	COMBINATION D-SUB		SW REFERENCE NO.: 628 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
NFORMS TO	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: N.T.S	SHEET 4 OF	4
N DIRECTIVES COMPLIANCY.	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 628W9W	/4-122-3N2	ISSUE
			PART NUMBER: 628W9W	/4-122-3N2	1



THIS SERIES FULLY CONI THE EUROPEAN UNION D 2011/65/EU FOR RoHS CC





17W5 Female

