

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.




| ISSUE NUMBER |  |
|--------------|--|
| ORIGINAL     |  |

(1)







.X ±0.25 .XX

±0.13 .XXX ±0.05

NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

(IF PRESENT)

COPPER ALLOY, 30µ" GOLD PLATED **OPERATING TEMPERATURE:** 

POWER/CO-AX CONTACT RATING:

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE:  $10m\Omega$  MAX.


**INSULATOR RESISTANCE:** DIELECTRIC WITHSTANDING VOLTAGE: -55°C ~ 125°C 20A (CURRENT)

5000MΩ min.

1000V AC rms

STEEL, TIN PLATED

THERMOPLASTIC POLYESTER, UL94V-0

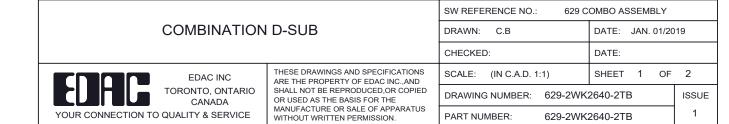





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



