



.XX ±0.13 .XXX ±0.05



ISSUE NUMBER	
ORIGINAL	(1)

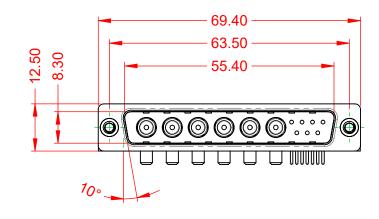



NOTES:


MATERIAL: HOUSING: SHELL: CONTACT:

DIELECTRIC

OPERATING TEMPERATURE:

WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED




POWER/CO-AX CONTACT RATING:	30A (CURRENT)
(IF PRESENT)	
SIGNAL CONTACT CURRENT RATING:	5A PER CONTAC
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.


СТ

-55°C ~ 125°C

1000V AC rms



				SW REFERENCE NO.: 629 COMBO ASSEMBLY					
C			DRAWN: C.B		DATE: 、	JAN. 01/20	19		
			CHECKED:		DATE:				
		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1	:1)	SHEET	1 OF	2		
	YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS	DRAWING NUMBER: 629-13W		6640-3TC		ISSUE		
YOUR CONNECTION TO QU			PART NUMBER:	629-13W6	6640-3TC		1		





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

