
Mounting Option


12-.128 (3.25) Dia. Side Mounting Holes

Contact Detail


500-Wire Hole .050x.025(1.27x0.64) - Tail LG=.260(6.60)

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

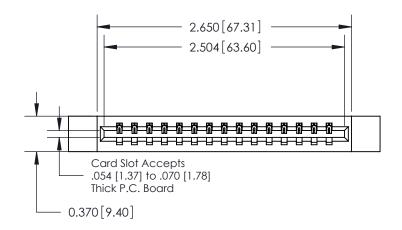

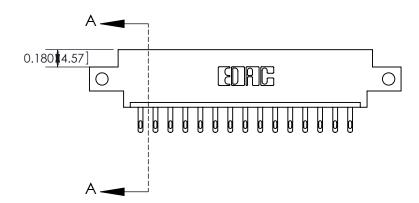





See Accompanying Pages for:

- **Contact Bend Details**
- **Mounting Options**
- **Features and Specifications**

837 Series High Temp Card Edge Connector Part Number: 887-015-500-612



| ACAD REFERENCE NO | 837 ENG MASTER | | | |
|-------------------|------------------|--|--|--|
| DRAWN: J.LEE | DATE: OCT. 06/09 | | | |
| CHECKED: | DATE: | | | |
| SCALE: NTS | SHEET 1 OF 4 | | | |
| DRAWING NUMBER | ISSUE | | | |

837 Assembly

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER

ISSUE NUMBE

ORIGINAL

1



| 837 Series High Temp Card Edge Connector Contact Bend Detail | | ACAD REFERENCE NO. 837 ENG MASTER | | | | |
|---|--|-----------------------------------|--------------|-------------------------|--|--|
| | | DRAWN: J.LEE | DATE: OC | DATE: OCT. 06/09 | | |
| | | CHECKED: | DATE: | | | |
| EDAC INC | EDAC INC TORONTO, ONTARIO CANADA TO QUALITY & SERVICE TORONTO, ONTARIO CANADA TO QUALITY & SERVICE THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | SCALE: NTS | SHEET 2 OF 4 | | | |
| | | DRAWING NUMBER | • | ISSUE | | |
| | | 837 Assembly | | 1 | | |





Features

- CSA Approved and UL Recognized
- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree & Extender Board Bends
- Single or Dual Row Configurations
- Large Variety of Mounting Options, Flush or Offset Lugs
- Pre-assembled Card Guides Available
- Accepts Between Contact and In-Contact Polarizing Keys

Specifications

- Insulator Material: DAP
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +165 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

| | 837 Series High Temp Card Edge Connector Features and Specifications | | ACAD REFERENCE NO. 837 ENG MASTER | | | |
|--|---|---|-----------------------------------|-------------|----------|-----------|
| | | | DRAWN: | J.LEE | DATE: OC | CT. 06/09 |
| | | | CHECKED: | | DATE: | |
| | | OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS | SCALE: | NTS | SHEET . | 4 OF 4 |
| | TORONTO, ONTARIO | | DRAWING | NUMBER | | ISSUE |
| | YOUR CONNECTION TO QUALITY & SERVICE | | 8 | 37 Assembly | | 1 |