




.XX ±0.13 .XXX ±0.05

Å



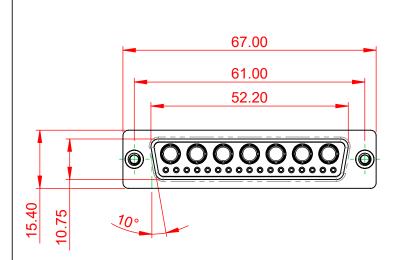



\exists

NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, Sn or Ni PLATED CONTACT: COPPER ALLOY SEE ORDERING GUIDE F

OPERATING TEMPERATURE: -55°C ~ 125°C


SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mQ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

	COMBINATION D-SUB		SW REFERENCE NO.: 628 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/201	19	
			CHECKED:	DATE:		
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4	
	TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 628-24W7224-2N5		ISSUE	
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 628-24W	7224-2N5	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

FOR PLATING	

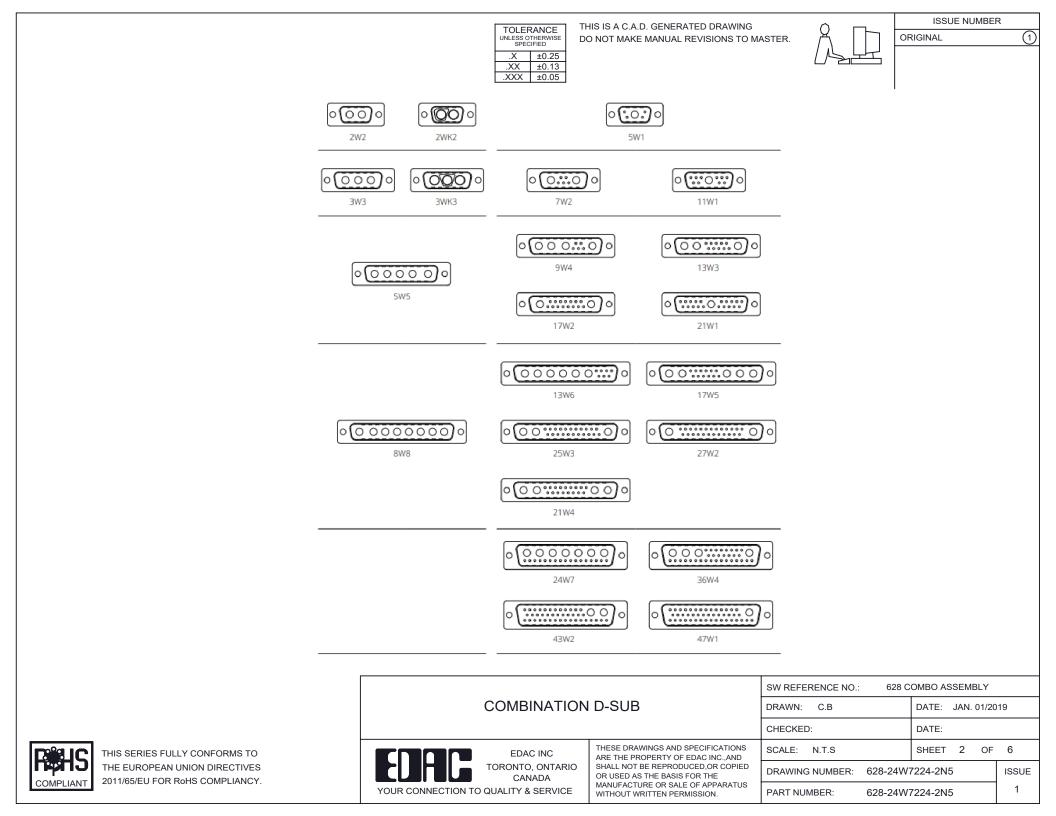

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25 .XX ±0.13 .XXX ±0.05





3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female





(1)

21W4 Male/Female

PART NUMBER:




628-24W7224-2N5


				••••• ↓ ↓ <u>_</u> 277	Ŷ	
		11W1 Male/Female	27W2 Male/Femal	e		
47.06 23.03 14.48 14.48 0 0 0 0 0 0 0 0 0 0 0 0 0	8W8 Female	33.30 16.65 9.70 8.31 9.70 8.31 9.70 8.31 9.70 8.31 9.70 8.31 9.70 8.31 9.70 8.31 9.70 8.31 9.70 8.31 9.70		83.50 31.75 2 15.24 ++++++++ +++++++++++++++++++++++++++		
88 ₊ ↓ ↓.6.89↓	[6.36] [.7.64_]	17W2 Male/Female	21W1 Male/Femal	e		
CURRENT RATING	G/ØA					
10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2					æ	
				SW REFERENCE NO.: 628 COMBO ASSEMBLY		
	COMBINA	ATION D-SUB	DRAWN: C.B	DATE: JAN. 01/20)19	
			CHECKED:	DATE:		
SERIES FULLY CONFORMS TO		ARE THE FROFERTT OF EDAC INC., AND	SCALE: N.T.S	SHEET 3 OF	4	
EUROPEAN UNION DIRECTIVES 1/65/EU FOR RoHS COMPLIANCY.	TORONTO, ON CANADA	OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 628-24VV	7224-2N5	ISSUE	
	YOUR CONNECTION TO QUALITY & SEF	RVICE MANUFACTURE OR SALE OF APPARATUS	PART NUMBER: 628-24W	7224-2N5	1	

5W5 Male


5W5 Female



8W8 Male




3.30



WITHOUT WRITTEN PERMISSION.

COMPLIANT



 TOLERANCE UNLESS OTHERWISE
 THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

 .X
 ±0.25









25W3 Male











13W3 Male











13W6 Male



43W2 Male






.XX ±0.13 .XXX ±0.05

9W4 Female


13W3 Female



43W2 Female


47W1 Female

36W4 Female



17W5 Male


COMPLIANT






2.77







	SW REFERENCE NO.: 628 COMBO AS			OMBO ASSEMBLY	
	COMBINATION	DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:	
THIS SERIES FULLY CONFORMS TO	EDAG INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: N.T.S	SHEET 4 OF	4
THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.			DRAWING NUMBER: 628-24W/224-2N5		ISSUE
			PART NUMBER: 628-24W	7224-2N5	1