



.XX ±0.13 .XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	1

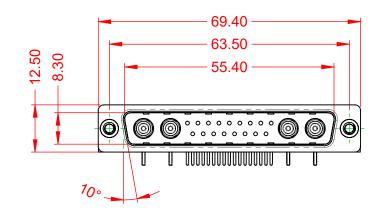




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED



POWER/CO-AX CONTACT RATING: (IF PRESENT)	50Ω (IMPEDAI
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONT 10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

DIELECTRIC WITHSTANDING VOLTAGE:


**OPERATING TEMPERATURE:** 

ANCE)

-55°C ~ 125°C

ITACT

1000V AC rms



	SW REFERENCE NO.: 629 COMBO ASSEMBLY			
COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19
			DATE:	
EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
		DRAWING NUMBER: 629-21W4	4640-5NC	ISSUE
		PART NUMBER: 629-21W4	4640-5NC	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

