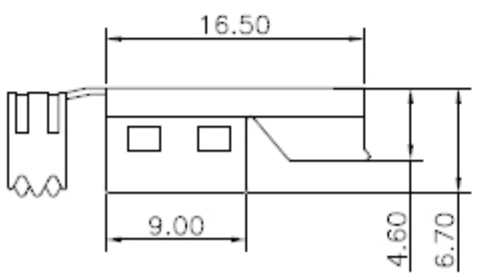
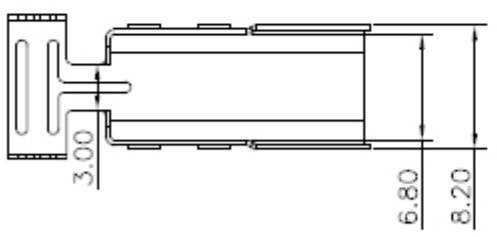
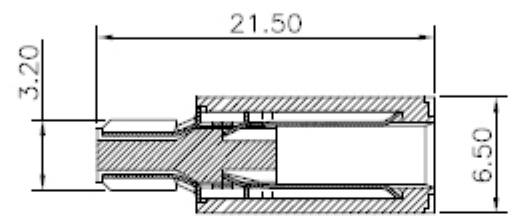
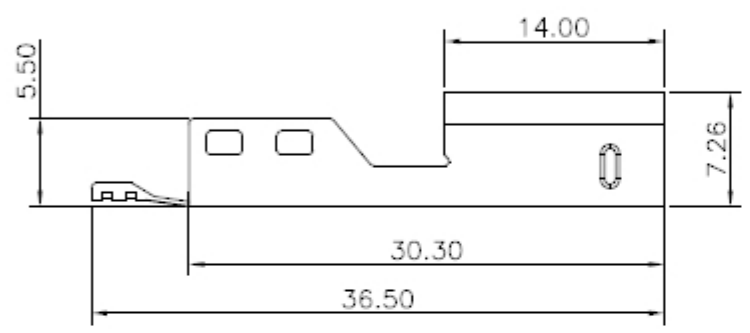

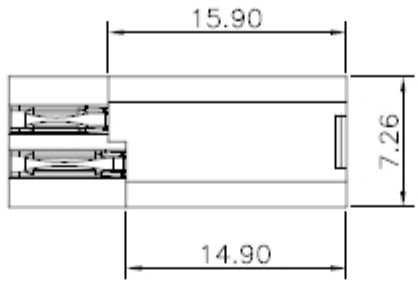
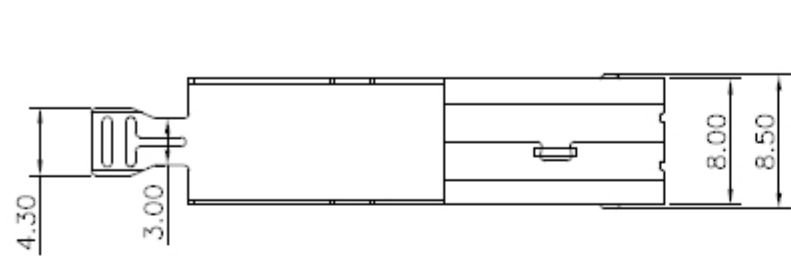




| | | | |
|-----|---------|--------|----------|
| REV | ECN.NO: | B Y | DATE |
| A0 | NEW-DWG | SYSTEM | 09/08/14 |

NOTE:
MATERIAL:
HOUSING: PBT+30%GF UL 94V-0
CONTACT: BRASS
SHELL: SPCC
PLATING:
CONTACT: GOLD FLASH AND TIN
OVER NICKEL PLATED
SHELL: NICKEL OVER ALL PLATING
SPECIFICATION:
VOLTAGE RATING: 30V
CURRENT RATING: 1.5A
CONTACT RESISTANCE TERMINAL: 30mΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
INSULATION RESISTANCE: 1000MΩ MIN
MECHANICAL:
MATING: 35N MAX.
WITHDRAWAL FORCE: 10N MIN
DURALITY: 1500 CYCLES MIN
ENVIRONMENTAL:
TEMPERATURE RANGE: -20°C ~ +85°C



| | | | | | | |
|--|--------------|---|----------------------------|-----------------------|------|------|
| -TOLERANCES- UNLESS OTHERWISE SPECIFIED | | CnC Tech,LLC | | | | |
| | |   | | TITLE: USB B/M 三件式 成品 | | |
| X.X ±0.30 | X.X' ±3' | APPD: | PRODUCT NO: 1001-028-02300 | | | |
| X.XX ±0.15 | X.XX' ±1' | CHECK: | DATE | SCALE | UNIT | PAGE |
| X.XXX ±0.10 | X.XXX' ±0.5' | DRAW: | 2009.08.14 | FREE | MM | Z 1 |