

COIL:


RESISTANCE 550 OHMS ± 10%
 NOMINAL VOLTAGE 24.0 VDC
 MUST OPERATE 12.0 VDC
 MUST RELEASE _____

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 30 g's
 * SHOCK 50 g's 11 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: * EXCEPTIONS TO 200G 11 MS
 ACCELERATION IS 50G INSTEAD OF 400G
3.5 MS MAX OPERATE INSTEAD OF 3.0 MS MAX.
3.0 MS MAX RELEASE INSTEAD OF 2.5 MS MAX.

CUSTOMER DATA SHEET

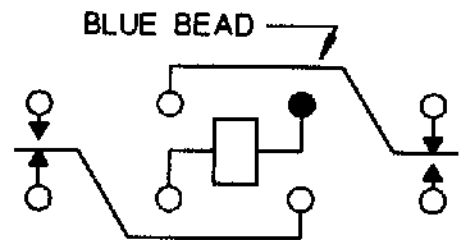

CONTACT RATING: LOW LEVEL TO 2 AMPS
30 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 3/18/92 CK. 3/18/92 JMB



CUST. POTTER & BRUMFIELD
 CUST. NO. SCG-11DB-24

TYPE 'FW' RELAY

FW1126S01