

ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	334724006	MX150 ASSY RCP 2x2 CPA BLK A/4	2	PC
C	330123001	MX150 RCPT 0.3 TIN 14/16AWG D WIND SLD	8	PC
D	884260070	PAPER PRINTED PAPER WHITE (S100X150YAJ)	1	PC

FROM	TO	CABLE PART#	DESCRIPTION	COLOR
A1	B2	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A2	B1	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A3	B4	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A4	B3	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK

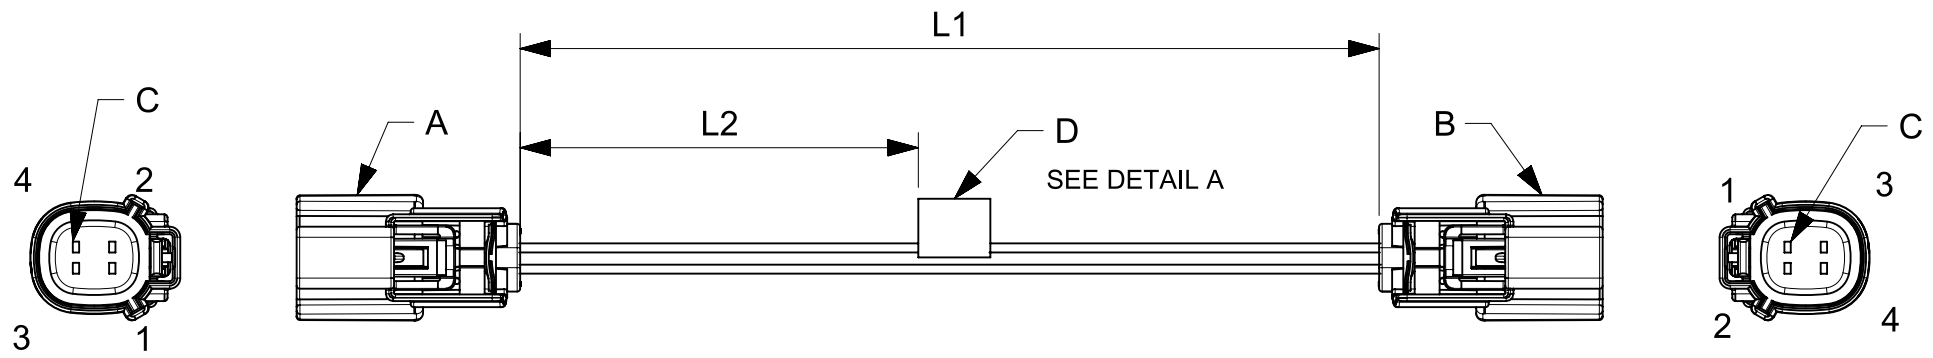


TABLE			
PART NUMBER	L1	L2	TITLE
2162851041	150±8	63 REF	MX150 R-R DR 4ckt 150mm Sn sealed cable
2162851042	300±10	138 REF	MX150 R-R DR 4ckt 300mm Sn sealed cable
2162851043	600±10	288 REF	MX150 R-R DR 4ckt 600mm Sn sealed cable

- NOTES**
1. Connector assembly must pass 100% continuity and polarity test.
 2. Sealing must pass the IP67 rating as defined by product specification.
 3. Connector view shown is from mating side.
 4. Label text must be 2mm max. in height with Arial font.
 5. Label must be wrapped in flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

FUNCTIONAL SYMBOLS $\frac{F}{A} = 0$ $\frac{F}{E} = 0$ $\frac{F}{P} = 0$ DIVISIONAL SYMBOLS	DIMENSION UNITS: mm SCALE: NTS		CURRENT REV DESC:				
	GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 643544 DRWN: NNANKOLA 2020/06/29 CHK'D: SD 2020/08/31 APPR: SD 2020/08/31				
	ANGULAR TOL ± °		INITIAL REVISION:		PRODUCT CUSTOMER DRAWING		
	4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±		DRWN: NNANKOLA 2020/06/29 APPR: SD 2020/08/31		DOCUMENT NUMBER 2162851041	DOC TYPE PSD	DOC PART 000
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING A4-SIZE	SERIES 216285	MATERIAL NUMBER SEE TABLE	CUSTOMER GENERAL MARKET	SHEET NUMBER 1 OF 1