



2S8WE4_1RP Series

2W - Single Output - Wide Input - Isolated & Regulated
DC-DC Converter

DC-DC Converter

2 Watt

- ⊕ Wide 4:1 input voltage range
- ⊕ Efficiency up to 80%
- ⊕ Regulated output types
- ⊕ I/O Isolation 1KVDC
- ⊕ Internal SMD construction
- ⊕ Operating temperature range: -40°C to +85°C
- ⊕ Continuous short circuit protection (SCP)
- ⊕ Industry standard pinout

The 2S8WE4_1RP series is a family of cost effective 2W single output DC-Dc converters, specially designed for applications where a wide range input voltage power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is wide range (voltage range \leq 4:1)
- 2) Where isolation is necessary between input and output (isolation voltage \leq 1000VDC)
- 3) Where the regulation of the output voltage and the output ripple noise are demanded



Common specifications	
Short circuit protection:	Continuous
Cooling:	Free air convection
Operation temperature range:	-40°C~+85°C
Operating case temperature:	100°C max.
Storage temperature range:	-40°C ~+125°C
Storage humidity range:	< 95%
Soldering temperature:	260°C max, 1.5mm from case for 10 sec
Switching frequency:	100~650kHz
Temperature coefficient:	0.02%/°C typ.
Case material:	Non-conductive black plastic [UL94-V0]
Potting material:	Epoxy [UL94-V0]
MTBF (MIL-HDBK-217F):	>1500000 hours
Weight:	4.5g
Dimensions:	21.8x9.2x11.1mm

Input specifications					
Item	Test condition	Min	Typ	Max	Units
Input filter	Capacitor				

Note:

1. All specifications measured at Ta=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
2. Capacitive load: test by nominal input voltage and constant resistor load.
3. Exceeding the absolut ratings of the unit could cause damage. It is not allowed for continuous operating.
4. In this datasheet, all the test methods of indications are based on corporate standards.

Output specifications						
Item	Test condition	Min	Typ	Max	Units	
Output voltage accuracy	Nominal Vin and full load			±3	%	
Line regulation	Vin=min to max,full load			±0.5	%	
Load regulation	20% to 100% full load			±0.8	%	
Ripple & Noise	20MHz Bandwidth • 5V-9V models • 12V-24V models			100 1% of Vout	mVp-p	
Transient response setting time	50% load step change		350		ms	

Isolation specifications					
Item	Test condition	Min	Typ	Max	Units
Isolation voltage		1000			VDC
Isolation resistance	500VDC, input to output	1000			MΩ

Example:

2S8WE4_2405S1RP
2=2Watt; S8= SIP8; W=wide input (4:1); E= cost effective; 9 - 36Vin;
5Vout; S= Single output; 1= 1000VDC; R= Regulated output
P= Short circuit protection


2S8WE4_1RP Series

2W - Single Output - Wide Input - Isolated & Regulated
DC-DC Converter

Part Number	Input Voltage [V]	Output Voltage [VDC]	Output Current [mA, max]	Efficiency [%, typ]
2S8WE4_2405S1RP	9-36	5	400	75
2S8WE4_2409S1RP	9-36	9	222	80
2S8WE4_2412S1RP	9-36	12	167	80
2S8WE4_2415S1RP	9-36	15	133	80
2S8WE4_2424S1RP	9-36	24	84	80
2S8WE4_4805S1RP	18-75	5	400	70
2S8WE4_4809S1RP	18-75	9	222	80
2S8WE4_4812S1RP	18-75	12	167	80
2S8WE4_4815S1RP	18-75	15	133	80
2S8WE4_4824S1RP	18-75	24	84	80

Typical characteristics


Temperature derating graph

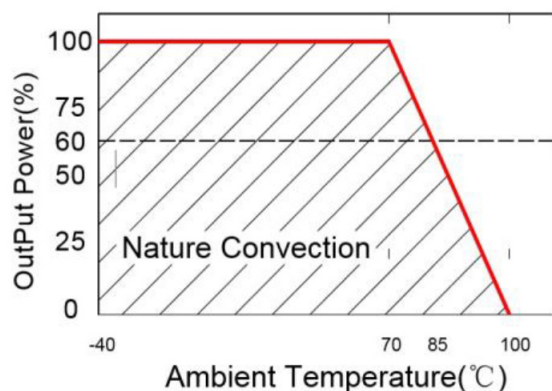

Recommended test circuit

When open or high impedance, the converter works well; when this pin is 'high', the converter shut down. It should be noted that the input current should be between 5-10mA, exceeding the maximum 20mA will cause permanent damage to the converter.


To make sure the product works at perfect operation status with full loading external capacitor is necessary and it is recommended to use high frequency low resistance electrolytic capacitor.

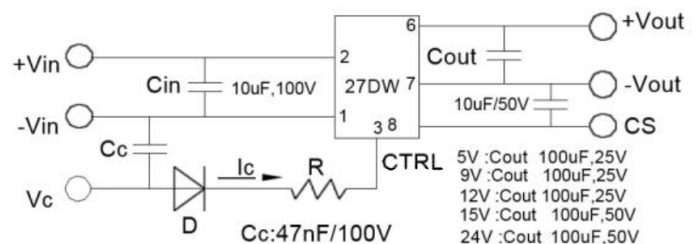

2S8WE4_1RP Series

2W - Single Output - Wide Input - Isolated & Regulated
DC-DC Converter

Mechanical specifications

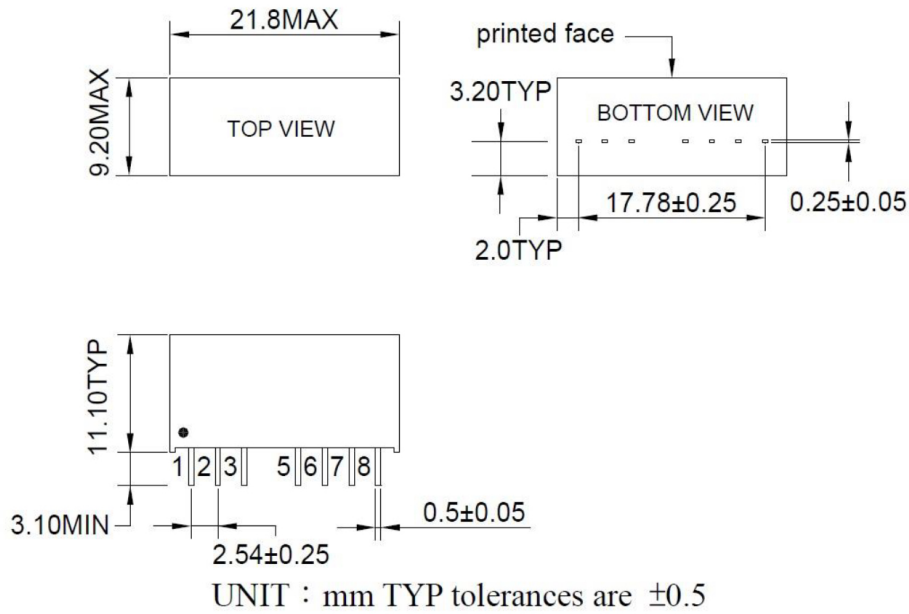

Pin number	Single
1	-Vin
2	+Vin
3	Ctrl-Control input can (can be left open)
5	NE-No external connection allowed
6	+Vout
7	-Vout
8	CS Optional External capacitor