

**Ratings**

Temperature: -40 ~ 70 °C  
Voltage: 150 V

**Conductor**

Gauge: 24 AWG 0.21 mm<sup>2</sup>  
Material: tinned copper strands  
Strand size:  $\varnothing 0.08 \times 41$   
Resistance at 20 °C: 95  $\Omega$  /km max

**Insulator**

Material: HDPE  
Color: green, blue, yellow, white, black, red  
Diameter:  $\varnothing 1.05 \pm 0.10$  mm  
Nominal thickness: 0.15 mm  
Resistance at 20 °C: 1000 M $\Omega$  /km min

**Shield**

Type: spiral  
Material: tinned copper strands  
Stranding:  $\varnothing 0.08$  mm  
Coverage: 90 % min

**Outer jacket**



Material: TPU  
Color: white (Cool Gray 1C)  
Nominal thickness: 0.50 mm  
Diameter:  $\varnothing 5 \pm 0.20$  mm

**Filler**

Material: aramid fiber

**Tests**

Tensile strength: 35.7 kgf  
Dielectric test: 1500 V dc for 1 minute without breakdown  
Bend test at 200 g,  $\pm 90^\circ$ , 30 cycles /min: 15,000 cycle minimum

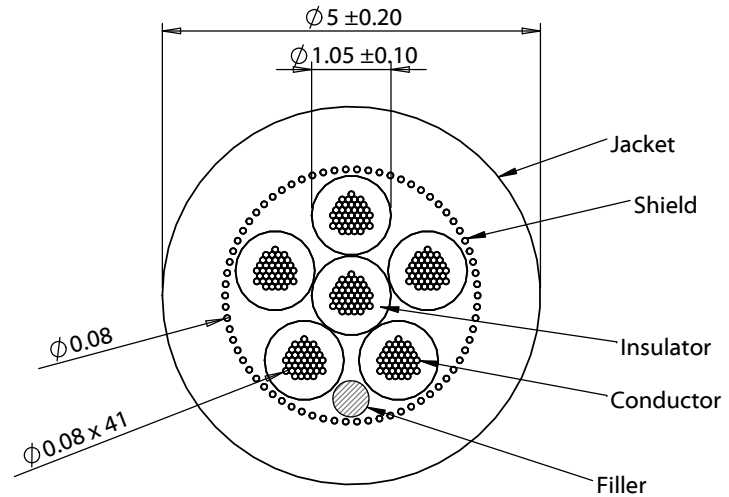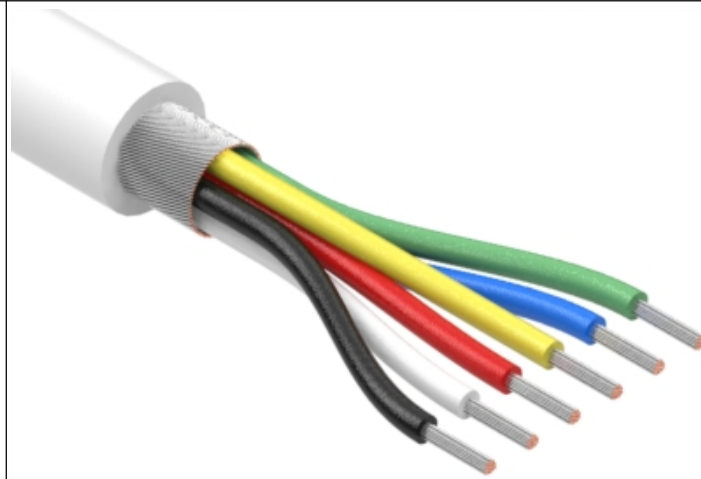

|           |            |                                         |                                                                                                              |                                                                                                                                                                |                                                                                                        |              |
|-----------|------------|-----------------------------------------|--------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------|
| Revision: | Date:      | Description:                            | Prepared:                                                                                                    | Notes:<br>RoHS compliant<br>Jacket meets ISO 10993 Biological Compatibility<br>Phthalate and halogen free<br>Function test: no open, no short, no intermittent | <h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118<br/>fax 1.541.323.4202 web tensility.com</p> |              |
| A         | 10/10/2018 | Initial release                         | Verified:                                                                                                    |                                                                                                                                                                |                                                                                                        |              |
| A1        | 1/18/2019  | Changed filler material to generic name | Dimensions are in millimeters.<br>Tolerances:<br>X: $\pm 0.5$ mm<br>X.X: $\pm 0.3$ mm<br>X.XX: $\pm 0.05$ mm | Description:                                                                                                                                                   | Size:                                                                                                  | Part number: |
|           |            |                                         |                                                                                                              | Wire, 6C TS, 24 AWG, 150V, 70C, 5.0 mm, shielded, TPU, 75A, white, WBL                                                                                         | A                                                                                                      | 30-01136     |
|           |            |                                         |                                                                                                              | Scale: 10:1                                                                                                                                                    |                                                                                                        | Sheet 1 of 1 |

5

4

3

2

1