


Data sheet | Item number: 787-1685

Redundancy Module; 2 x 24 VDC input voltage; 2 x 20 A input current; 24 VDC output voltage; 40 A output current



www.wago.com/787-1685

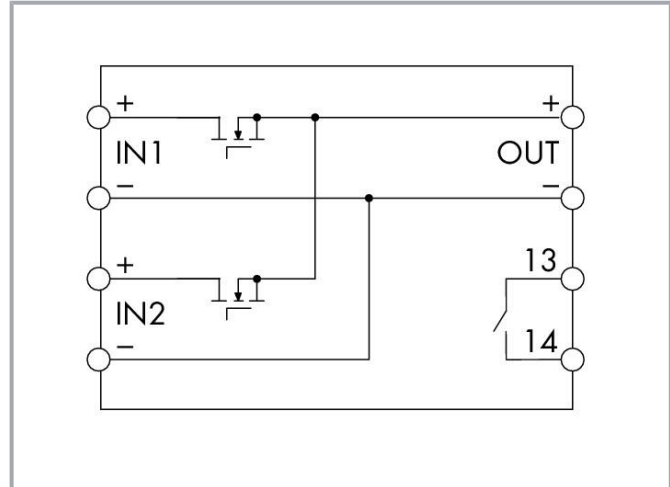

Item description

Features:

- Redundancy module with low-loss MOFSET decouples two power supplies.
- For redundant and fail-safe power supply
- Continuous output current: 40 ADC, in any ratio of both inputs (e.g., 20 A / 20 A or 0 A / 40 A)
- Suitable for power supplies with PowerBoost and TopBoost

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



- Same profile as CLASSIC Power Supplies
- Electrically isolated output voltage (SELV/PELV) per EN 61140/UL 60950-1

Data

Technical data

Input

Nominal input voltage $U_{i\text{ nom}}$	2 x DC 24 V
Input voltage range	2 x DC 10 ... 36 V
Nominal mains frequency range	0 Hz
Input current I_i	≤ 40 A (per path); ≤ 40 A (in total)
PowerBoost input	DC 60 A (4 s); DC 50 A (8 s)
TopBoost input	DC 100 A (50 ms)

Output

Nominal output voltage $U_{o\text{ nom}}$	DC 24 V
Output voltage range	DC 10 ... 36 V (U_e - voltage drop)
Voltage drop	≤ 100 mV (Input/output)
Nominal output current $I_{o\text{ nom}}$	40 A (redundancy operation); 40 A (parallel operation)
Nominal output power	960 W
Switching frequency	5 kHz
PowerBoost	DC 120 A (4 s); DC 100 A (8 s)
TopBoost	DC 200 A (50 ms)

Signaling and Communication

Signaling	1 x IN1 LED (green) 1 x IN2 LED (green) 1 x DC OK signal contact (IN1 and IN2 > 10 VDC)
Operation status indicator	2 x Green LED ($U_o > 10$ VDC)

Efficiency/power losses

Power loss P_l	≤ 1.5 W; ≤ 9.5 W (nominal load)
Efficiency (typ.)	99.5 %

Subject to changes. Please also observe the further product documentation!



Circuit protection

Internal fuse	No
---------------	----

Safety and protection

Protection class	III
Protection type	IP20; per EN 60529
Reverse voltage protection	Yes
Pollution degree	2
Parallel operation	Yes
Series operation	No
MTBF	> 500,000 h (per IEC 61709)

Connection data

Connection type 1	Input/output
Connection technology	Push-in CAGE CLAMP®
WAGO connector	WAGO 831 Series
Solid conductor	0.5 ... 10 mm ² / 20 ... 8 AWG
Fine-stranded conductor	0.5 ... 10 mm ² / 20 ... 8 AWG
Strip length	13 ... 15 mm / 0.51 ... 0.59 inches
Connection type 2	Signaling
Connection technology 2	CAGE CLAMP®
WAGO connector 2	WAGO 721 Series
Solid conductor 2	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductor 2	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Strip length 2	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data

Width	42 mm / 1.654 inches
Height	127 mm / 5 inches
Depth from upper-edge of DIN-rail	139.5 mm / 5.421 inches

Mechanical Data

Mounting type	DIN-35 rail
---------------	-------------

Subject to changes. Please also observe the further product documentation!



Material Data

Fire load	1.083 MJ
Weight	450 g

Environmental requirements

Ambient temperature (operation)	-40 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	5 ... 96 % (no condensation permissible)
Derating	-1.5 %/K (> 65 °C)

Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61010-1 EN 61010-2-201 EN 61000-6-2 EN 61000-6-3 UL 60950 UL 508 DNV EN 61140

Commercial data

eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143534529
Customs tariff number	85363030888




Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------


Subject to changes. Please also observe the further product documentation!

Approvals / Certificates


General approvals

Logo	Approval	Additional Approval Text	Certificate name
	EAC Brjansker Zertifizierungsstelle	TP TC 020/2011	EAC_Certificate_RU_C-DE.AM02.B.00115_19
	UL Underwriters Laboratories Inc.	UL 508	E255817
	UL Underwriters Laboratories Inc.	UL 60950-1	E255815

Declarations of conformity and manufacturer's declarations



Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Approvals for marine applications







Logo	Approval	Additional Approval Text	Certificate name
	DNV DNV Germany GmbH	DNV-CG-0339,Aug.2021	TAA00000KT

Optional accessories


Marking accessories

Marking strip			
	Item no.: 2009-110 Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white		www.wago.com/2009-110
	Item no.: 210-831 Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white		www.wago.com/210-831



Subject to changes. Please also observe the further product documentation!

	<p>Item no.: 210-832 Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white</p>	www.wago.com/210-832
Marker		
	<p>Item no.: 2009-145 Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white</p>	www.wago.com/2009-145
	<p>Item no.: 2009-115 WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white</p>	www.wago.com/2009-115
	<p>Item no.: 248-501 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white</p>	www.wago.com/248-501
	<p>Item no.: 793-501 WMB marking card; as card; not stretchable; plain; snap-on type; white</p>	www.wago.com/793-501
	<p>Item no.: 793-5501 WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white</p>	www.wago.com/793-5501

Mounting adapter

DIN-rail adapter		
	<p>Item no.: 787-897/000-010 Carrier rail adapter made of zinc die-cast; horizontal mounting of 787-16xx (TS35)</p>	www.wago.com/787-897/000-010

Tool

Operating tool		
	<p>Item no.: 210-721 Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured</p>	www.wago.com/210-721
	<p>Item no.: 210-720 Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured</p>	www.wago.com/210-720

Downloads

Documentation

Bid Text

787-1685	2019 Jul 15	docx	Download
docx - Datei		23.2 kB	

787-1685

Subject to changes. Please also observe the further product documentation!



787-1685 X81 - Datei	2019 Jul 15	xml 7.1 kB	Download
-------------------------	-------------	---------------	----------

Instruction Leaflet

Redundanzmodul MOSFET, DC 24 V, 40 A	2022 Apr 20	pdf 266.9 kB	Download
---	-------------	-----------------	----------

Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 Aug 18	pdf 2.2 MB	Download
---	------------------------	---------------	----------

CAD/CAE-Data

CAD data

2D/3D Models 787-1685		URL	Download
-----------------------	--	-----	----------

CAE data

EPLAN Data Portal 787-1685		URL	Download
----------------------------	--	-----	----------

ZUKEN Portal 787-1685		URL	Download
-----------------------	--	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 787-1685 Redundancy Module; 2 x 24 VDC input voltage; 2 x 20 A input current; 24 VDC output voltage; 40 A output current		URL	Download
--	--	-----	----------

Installation Notes

Subject to changes. Please also observe the further product documentation!