

	т	۵	п –	п	0	
]						



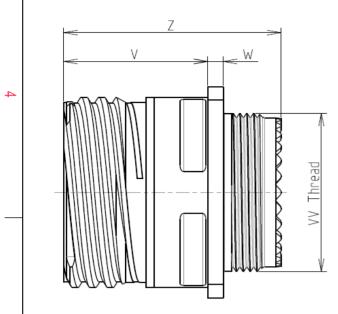

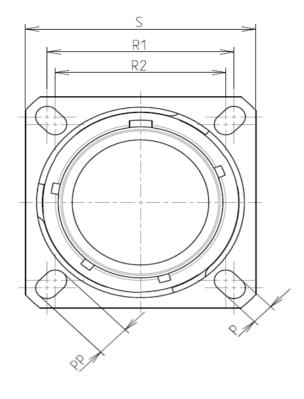

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 19

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite				
-Shell Plating	: Without Plating				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: -65°C to +175°C				

: 2000 hours

: 39.7 g ± 10%

8D 0

G

19

Х

11


В


F

А

Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	29.36		
R2	26.97		
S	36.5±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	31.5 Max M28x1-6g		

Е



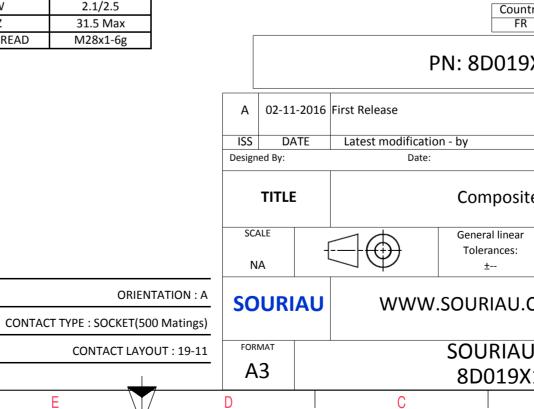

							1
	Ξ			A			
							4
AS EX4	AMPLE						3
s which er of t indation untry FR	non-conformit th does not co he Parties or b on, technical n Jurisd	mply wit by a thirc otice.)	h I party Control Li	st]		2
					N	IOD N°	
site	CUSTOMER DRAWING Receptacle 8D series						
ar	NPRDS / PROJECT						
	859						1
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	DRG N°				9	SHEET	
X1	1BA-C			Δ		1/2	J
	В			А			

