



ÅÞ

ISSUE NUMBER	
ORIGINAL	

(1)

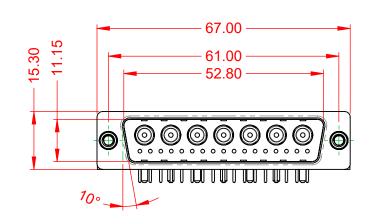




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED



POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. **INSULATOR RESISTANCE:**

.X ±0.25 .XX ±0.13 .XXX ±0.05

DIELECTRIC WITHSTANDING VOLTAGE:


OPERATING TEMPERATURE:

10A (CURRENT)

-55°C ~ 125°C

5000MΩ min.

1000V AC rms



	COMBINATION D-SUB			SW REFERENCE NO.: 629 COMBO ASSEMBLY			
				DATE: JAN. 01/20	19		
			CHECKED:	DATE:			
	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2			
	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629-24W7240-1NE		ISSUE		
YOUR CONNECTION TO			PART NUMBER: 629-24V	/7240-1NE	1		



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

