

TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)





NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

DIELECTRIC


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED

OPERATING TEMPERATURE:

WITHSTANDING VOLTAGE:


.X±0.25.XX±0.13.XXX±0.05

POWER/CO-AX CONTACT RATING: (IF PRESENT)	75Ω (IMPEDANCE)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

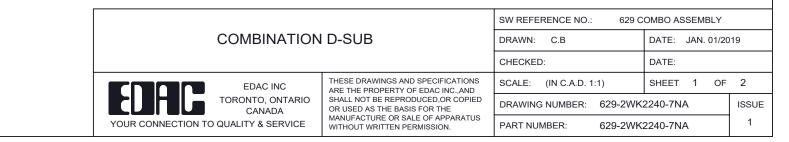

-55°C ~ 125°C

1000V AC rms





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

