
ב   ס   			0		A	
Z'	ØS					
			L	AYOUT SHOWN AS EXAMPLE		
	Keying Shown as example					
CHARACTERISTICS	Connector dime					
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Cold over conner Alloy 0.8um minimum	ØS Z'	Nominal44.9 Max31.5 MaxM34x1-6g	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)			
-Durability : 500 Mating cycles			PN: 8D523M06AN			
-Delivered with Souriau contacts and Accessories -Temperature Range <u>-</u> -65°C to +200°C						
-Salt Spray : 2000 hours		A	06-10-2016 First Release DATE Latest modificat	ion hu	MOD	
			ned By: Date			
			TITLE Composite Plug 8D series		series	
BASIC SERIES: 8D 5 - 23 M SHELL TYPE : Plug with RFI Shielding	1 06 A N		VA	General linear Tolerances: ±	NPRDS / PROJECT 859	
			OURIAU WWW	.SOURIAU.COM	This document is the property of SOURIAU it must not be reproduced or	
CONTACT TYPE : Standard Crimp Contact		T TVDE · DINI/EOO Matingo				
CONTACT TYPE       : Standard Crimp Contact         SHELL SIZE       : 23         PLATING       : M = Nickel		T TYPE : PIN(500 Matings) CONTACT LAYOUT : 23-06	RMAT	SOURIAU DRG N°	communicated without permission	

F	т	۵	г	т	D	0
		Contact Layout				
		06				
4						
		6#8 Concentric Twinax Service M				
_		23-06	1			
	Ctc	X Y	-			
	A	0 9.24	-			
	В	8.81 2.87				
	С	5.43 -7.49	]			
ω	D	-5.43 -7.49	]			
	E	-8.81 2.87	-			
	F	0 0	]			
-						
	_					
						SOURIAU shall not be liable for an due to a use of the Products w
						the Specifications issued by either o
						(professional recommenda
						Count
N						FR
						PN: 8D523N
					A 06-10-20	16 First Release
_					ISS DATE Designed By:	Latest modification - by Date:
					Designed by.	
					TITLE	Compo
					SCALE	General linear
<b>_</b>					NA	Tolerances:
					SOURIA	U WWW.SOURIAU.
						SOURIAU
		1	1		A3	8D523M
	Н	G	l F	E	D	C

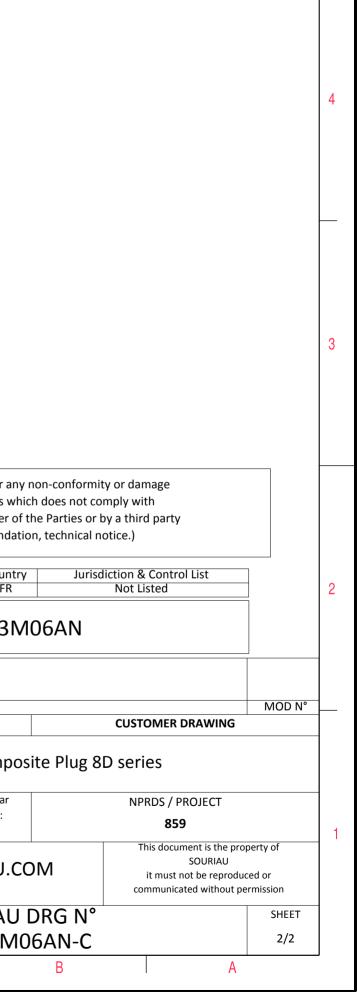

 $\triangleright$ 

σ