

AGH100 Series

Half Brick Fully Regulated DCDC Converter

Data Sheet

Output Power: 82.5 Watts
Input Voltage: 36 - 75 V
Single Output: 3.3 V

SPECIAL FEATURES

- 2:1 wide input range
- Optimised for high density, small space applications
- Low ripple and noise
- Fixed switching frequency
- High efficiency
- High capacitive load capability
- Basic insulation system
- Pre-bias start-up capability
- Openframe structure with Baseplate option

SAFETY

- UL, cUL: UL60950
- TUV/CE: IEC/EN60950



Electrical Specifications

Input	
Input range	36 - 75 VDC
Input surge	100 V for 100 ms
Efficiency	92.4% (3.3 V)
Output	
Output voltage	3.3 Vdc
Trim range	+10% to =20% Vout
Output current	25 A
Noise/ripple	45 mV pk-pk
Regulation	Load regulation 16.5 mV, Line regulation = 6.6 mV
Switching frequency	Fixed switching frequency 270 KHz
Isolation voltage	2000 Vdc
Transient response	80 mV deviation 80 μ s recovery (25% deviation from 50% Iout, 0.1 A/ μ s) typical
Control	
Enable	TTL compatible Positive or Negative enable

Environmental Specifications

Operating ambient temperature range	-40 °C to +85 °C
Storage temperature	-55 °C to +125 °C
OTP	118 °C
MTBF @ 25 °C	2 Million hours (Vin 48 V, Io = 20 A)

Ordering Information


Model number	Input voltage	Output voltage	Power	Efficiency
AGH100-48S3V3P-4L	48 V	3.3 V	25 A	92.4%
AGH100-48S3V3-4L	48 V	3.3 V	25 A	92.4%
AGH100-48S3V3PB-4L	48 V	3.3 V	25 A	92.4%
AGH100-48S3V3B-4L	48 V	3.3 V	25 A	92.4%

- Standard converter is Negative enable
- "B" = Baseplate option
- "-4" = 4.8 mm pin length
- "-P" = Positive remote control
- "-L" = RoHS 6 compliant

Pin Assignments

Pin #	Function
1	+V in
2	Enable
3	Case
4	-V in
5	-V out
6	-Sense
7	Trim
8	+Sense
9	+V out

Mechanical Drawing - Open Frame

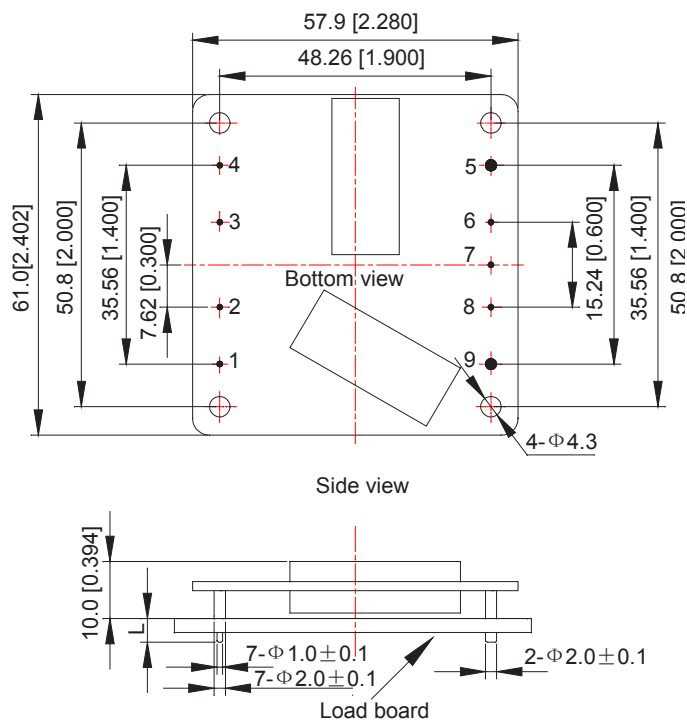

Unit: mm[inch] Bottom view: pin on upside
 Tolerance: X.Xmm ± 0.5mm[X.X in. ± 0.02in.]
 X.XXmm ± 0.25mm[X.XX in. ± 0.01in.]

Notes:

1. 20 MHz bandwidth. External 10 uF tantalum capacitor placed across +Vout and -Vout; 33 uF e-cap or equivalent placed across +Vin and -Vin.
2. Efficiency measurements taken at full load and nominal line and Tamb = 25 °C
3. All specifications taken at nominal line, full load and Tamb = 25 °C unless otherwise noted.
4. Mechanical dimensions are for reference only. Dimensions are in MM. Mechanical tolerance = +/- 0.5 mm
5. Technical reference notes should be consulted for detailed information when available.
6. All specifications subject to change without notice.
7. Warranty 2 years.
8. The through-hole terminated modules are intended for wave-soldering process; special request for other manufacturing processes to be made to Artesyn.

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
 Suite B100
 Tempe, AZ 85282, USA
 +1 888 412 7832

Europe (UK)

Ground Floor Offices, Barbary House
 4 Harbour Buildings, Waterfront West
 Brierley Hill, West Midlands
 DY5 1LN, UK
 +44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
 2 Wing Yip Street
 Kwun Tong, Kowloon
 Hong Kong
 +852 2176 3333

ARTESYN[™]
 An Advanced Energy Company

www.artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com
 For support: productsupport.ep@artesyn.com