



S21 TRANS LOG MAG.
▶0.000 dB 0.400 dB/DIV

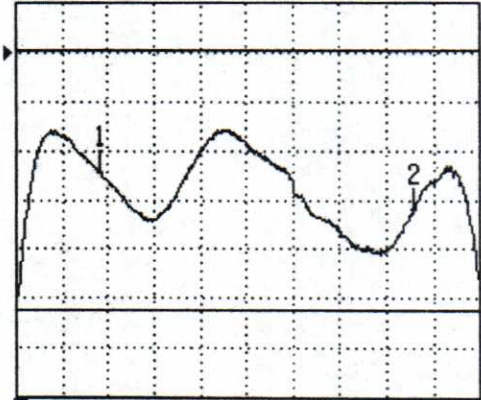


18.000000000 GHz 40.000000000

S22 REFL LOG MAG.
▶0.000 dB 5.000 dB/DIV

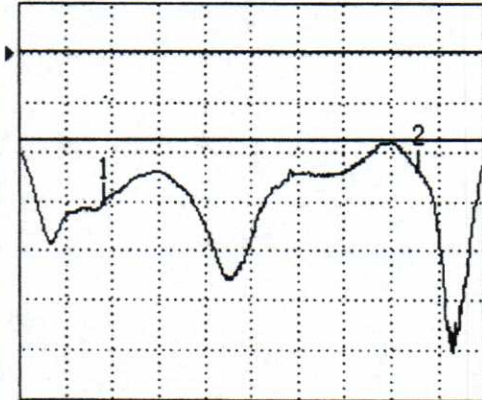


18.000000000 GHz 40.000000000

S11 REFL LOG MAG.
▶0.000 dB 5.000 dB/DIV

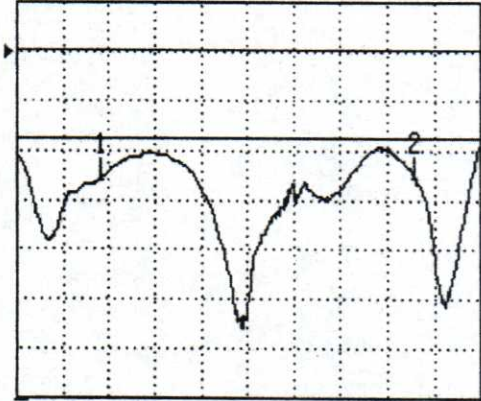

18.000000000 GHz 40.000000000

S12 TRANS LOG MAG.
▶0.000 dB 5.000 dB/DIV

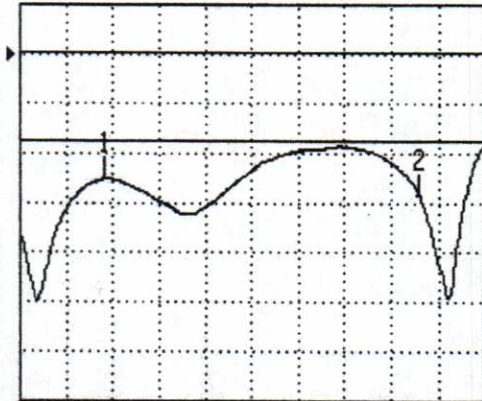

18.000000000 GHz 40.000000000

SELECT
READOUT MARKER
▶MARKER 1
22.015000000 GHz
MARKER 2
36.975000000 GHz

ΔREF MODE IS OFF
PRESS <ENTER>
TO SELECT

D3C1840 - Circulator
18.00 - 40.00 GHz
Isolation: 9 dB Min
Insertion Loss: 2.10 dB Max
VSWR: 2.10:1 Max
SMA-F All 3 Ports